INSTRUCTION MANUAL



HI83303

Multiparameter Photometer

for Aquaculture

Hanna Instruments Inc., 584 Park East Drive, Woonsocket, RI 02895 USA
www.hannainst.com

Dear Customer,

Thank you for choosing a Hanna Instruments® product.
Please read this instruction manual carefully before using this instrument as it provides the necessary information for correct use of this instrument, as well as a precise idea of its versatility.
If you need additional technical information, do not hesitate to e-mail us at tech@hannainst.com.
Visit www.hannainst.com for more information about Hanna Instruments and our products.

All rights are reserved. Reproduction in whole or in part is prohibited without the written consent of the copyright owner, Hanna Instruments Inc., Woonsocket, Rhode Island, 02895, USA.
Hanna Instruments reserves the right to modify the design, construction, or appearance of its products without advance notice.

TABLE OF CONTENTS

1. Preliminary Examination 4

2. Safety Measures 4

3. Specifications 5

4. Description 6
4.1. General Description & Intended Use 6
4.2. Precision & Accuracy 6
4.3. Functional Description 7
4.4. Principle of Operation 8
4.5. Optical System 9

5. General Operations 10
5.1. Power Connection & Battery Management 10
5.2. Mode Selection 10
5.3. General Setup 11
5.4. Contextual Help 14

6. Logging Data & Data Management 15
6.1. Logging Data 15
6.2. Adding Sample & User Names to Log Data 15
6.3. Data Management 16

7. Photometer Mode 17
7.1. Method Selection 17
7.2. Collecting & Measuring Samples and Reagents . 17
7.3. Cuvette Preparation 18
7.4. Timers & Measurement Functions 19
7.5. Chemical Formula & Unit Conversion 19
7.6. Meter Validation & CAL Check™ 20
7.7. Absorbance Measurements 20

8. Probe Mode 21
8.1. pH Measurement 21
8.2. pH Calibration 21
8.3. pH Messages & Warnings 22
8.4. pH GLP 24
8.5. pH Electrode Conditioning & Maintenance 24

9. Method Procedures 26
9.1. Alkalinity 26
9.2. Alkalinity, Marine 28
9.3. Ammonia, Marine 30
9.4. Ammonia Low Range 32
9.5. Ammonia Medium Range 34
9.6. Ammonia High Range 36
9.7. Calcium 38
9.8. Calcium, Marine 40
9.9. Chlorine, Free 42
9.10. Chlorine, Total 44
9.11. Copper Low Range 46
9.12. Copper High Range 48
9.13. Magnesium, Marine 50
9.14. Nitrate 52
9.15. Nitrate, Marine Low Range 54
9.16. Nitrate, Marine High Range 57
9.17. Nitrite, Marine Ultra Low Range 59
9.18. Nitrite Low Range 61
9.19. Nitrite High Range 63
9.20. Oxygen, Dissolved 65
9.21. pH 67
9.22. Phosphate, Marine Ultra Low Range 68
9.23. Phosphate Low Range 70
9.24. Phosphate High Range 72

10. Warnings & Errors 74

11. Standard Methods 76

12. Accessories 77
12.1. Reagent Sets 77
12.2. pH Electrodes 78
12.3. pH Solutions 79
12.4. Other Accessories 80

13. Abbreviations 81

Certification 82

Recommendations for Users 82

Warranty 82

1. PRELIMINARY EXAMINATION

Remove the instrument and accessories from the packaging and examine it carefully. For further assistance, please contact your local Hanna Instruments® office or email us at tech@hannainst.com.
Each HI83303 is supplied complete with:

- Sample cuvette (4 pcs.)
- Sample cuvette cap (4 pcs.)
- Cloth for wiping cuvettes
- Scissors
- USB cable
- 5 Vdc power adapter
- 60 mL glass bottle
- Instrument quality certificate
- Instruction manual

***Note**: Save all packing material until you are sure that the instrument works correctly. Any damaged or defective item must be returned in its original packing material with the supplied accessories.*

2. SAFETY MEASURES



- The chemicals contained in the reagent kits may be hazardous if improperly handled.
- Safety equipment
  Wear suitable eye protection and clothing when required and follow instructions carefully.
- Reagent spills
  If a reagent spill occurs, wipe up immediately and rinse with plenty of water.
  If reagent contacts skin, rinse the affected area thoroughly with water. Avoid breathing released vapors.
- Waste disposal
  For proper disposal of reagent kits and reacted samples, contact a licensed waste disposal provider.

3. SPECIFICATIONS

Measurement Channels		5 × optical channels 1 × digital electrode channel (pH measurement)
Photometer	Range	0.000 to 4.000 Abs
	Resolution	0.001 Abs
	Accuracy	±0.003 Abs @ 1.000 Abs
	Light source	Light Emitting Diode
	Bandpass filter bandwidth	8 nm
	Bandpass filter wavelength accuracy	±1.0 nm
	Light detector	Silicon photocell
	Cuvette types	Round, 24.6 mm diameter
	Number of methods	29
Probe	Range	−2.00 to 16.00 pH (±1000.0 mV)*
	Resolution	0.01 pH (0.1 mV)
	Accuracy	±0.01 pH (±0.2 mV) @ 25 °C / 77 °F
	Temperature compensation	ATC, -5.0 to 100.0 °C (23.0 to 212.0 °F)*
	Calibration	two-point, from five available buffers (4.01, 6.86, 7.01, 9.18, 10.01 pH)
	Electrode	Intelligent pH / temperature electrode
Temperature	Range	−20.0 to 120.0 °C (−4.0 to 248.0 °F)
	Resolution	0.1 °C (0.1 °F)
	Accuracy	±0.5 °C @ 25 °C (±0.9 °F @ 77 °F)
Additional Specifications	Logging	1000 readings (mixed photometer and electrode)
	Display	128×64 pixel B/W LCD with backlight
	USB-A (Host) functions	Mass-storage host
	USB-B (Device) functions	Power input, mass-storage device
	Battery life	>500 photometer measurements or 50 hours of continuous pH measurement
	Power supply	5 Vdc USB 2.0 power adapter / type micro-B connector 3.7 Vdc Li-polymer rechargeable battery, non-serviceable
	Environment	0 to 50 °C (32 to 122 °F) 0 to 95% RH, non-serviceable
	Dimensions	206×177×97 mm (8.1×7.0×3.8")
	Weight	1.0 kg (2.2 lbs.)

*Limits will be reduced to actual probe / sensor limits.

4. DESCRIPTION


4.1. GENERAL DESCRIPTION & INTENDED USE

HI83303 multiparameter photometer is a compact and versatile meter with two measurement modes, Photometer and Probe. Photometer mode includes a CAL Check™ feature and 29 different methods that cover a wide variety of applications, making it ideal for both benchtop and portable operations.
With the CAL Check feature users are able to validate the performance of the instrument and apply a user calibration (if necessary). Hanna Instruments® CAL Check cuvettes are made with NIST traceable standards. Probe mode uses a digital pH probe with a one or two-point calibration.


- Digital electrode input for pH measurements
- Certified CAL Check cuvettes to confirm meter functionality
- Dual purpose micro-USB flash drive
- Lithium polymer rechargeable battery
- Auto-off
- Absorbance mode
- User and sample name entry
- GLP features

4.2. PRECISION & ACCURACY

Precision is how closely repeated measurements are to one another. Precision is usually expressed as standard deviation. Accuracy is defined as the closeness of a test result to the true value. Although good precision suggests good accuracy, precise results can be inaccurate. The figure explains these definitions. For each method, the accuracy is expressed in the related measurement section.

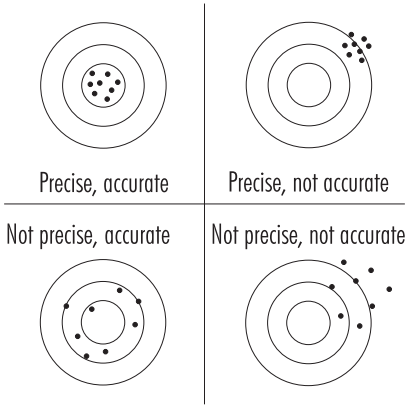

4.3. FUNCTIONAL DESCRIPTION

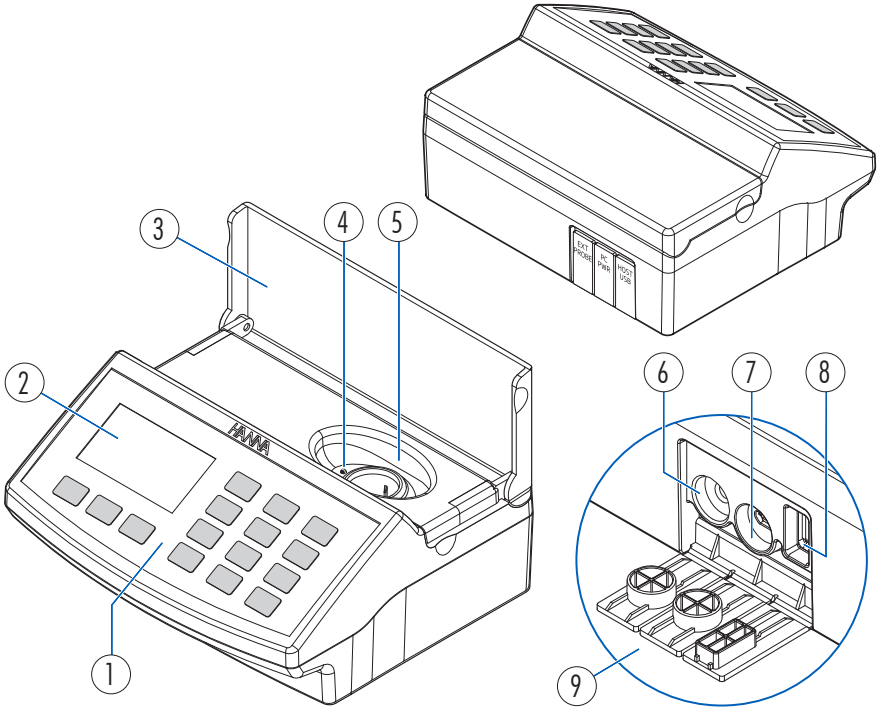

1. Splash-proof keypad
2. Liquid Crystal Display (LCD)
3. Light-blocking cover panel (opened)
4. Indexing mark
5. Cuvette holder
6. 3.5 mm TRRS (jack) input for digital electrodes
7. Micro-USB device connector for power or PC interface
8. Standard USB host connector for data transfer to a USB flash drive
9. Protective port covers

Keypad Description

The keypad contains 12 direct keys and 3 functional keys with the following functions:


Press the functional key to perform the function displayed above it on the LCD.



Press to access the list of photometer methods.



Press to move up in a menu or a help screen, to increment a set value or to access second level functions.



Press to toggle between photometer and probe (pH electrode) mode.



Press to move left in a menu or to decrement a set value.



Press to move down in a menu or a help screen, to decrement a set value or to access second level functions.



Press to move right in a menu or to increment a set value.



Press to access the setup screen.



Press to log the current reading.



Press to review saved logs.



Press to exit the current screen.



Press to display the help screen.


ON/OFF power button

4.4. PRINCIPLE OF OPERATION

Absorption of light is a typical phenomenon of interaction between electromagnetic radiation and matter. When a light beam crosses a substance, some of the radiation may be absorbed by atoms, molecules or crystal lattices. Photometric chemical analysis is based on specific chemical reactions between a sample and reagent to produce a light-absorbing compound.

If pure absorption occurs, the fraction of light absorbed depends both on the optical path length through the matter and on the physical-chemical characteristics of the substance according to the Lambert-Beer Law. If all other factors are constant, the concentration "c" can be calculated from the absorbance of the substance.

Lambert Beer Law:


$$-\log I/I_o = \varepsilon_\lambda \, c \, d$$

or

$$A = \varepsilon_\lambda \, c \, d$$

I_o	=	intensity of incident light beam
I	=	intensity of light beam after absorption
ε_λ	=	molar extinction coefficient at wavelength λ
c	=	molar concentration of the substance
d	=	optical path through the substance

4.5. OPTICAL SYSTEM

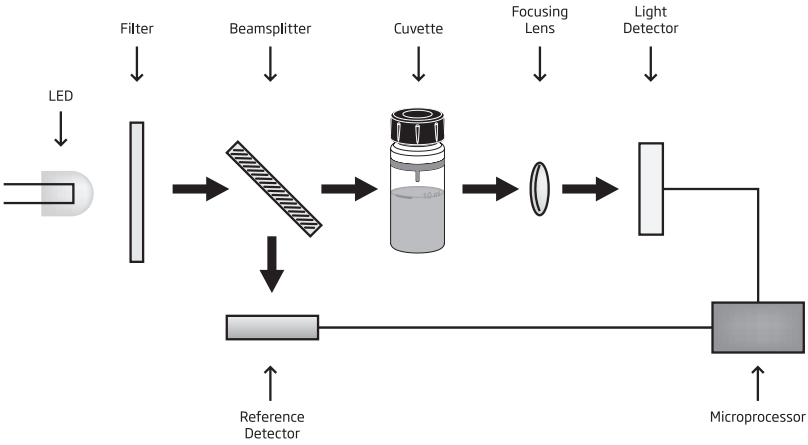

Instrument Block Diagram

The internal reference system (reference detector) of the HI83303 photometer compensates for any drifts due to power fluctuations or ambient temperature changes, providing a stable source of light for your blank (zero) measurement and sample measurement.

LED light sources offer superior performance compared to tungsten lamps. LEDs have a much higher luminous efficiency, providing more light while using less power. They also produce little heat, which could otherwise affect electronic stability. LEDs are available in a wide array of wavelengths, whereas tungsten lamps have poor blue / violet light output.

Improved optical filters ensure greater wavelength accuracy and allow a brighter, stronger signal to be received. The end result is higher measurement stability and less wavelength error.


A focusing lens collects all of the light that exits the cuvette, eliminating errors from cuvette imperfections and scratches, eliminating the need to index the cuvette.

5. GENERAL OPERATIONS


5.1. POWER CONNECTION & BATTERY MANAGEMENT

The meter can be powered from an AC / DC adapter (included) or from the built-in rechargeable battery.
The meter will perform an auto-diagnostic test when it is first powered on. During this test, the Hanna Instruments® logo will appear on the LCD. After 5 seconds, if the test was successful, the last method used will appear on the display.
The battery icon on the LCD will indicate the battery status:


- battery is charging from external adapter




- battery fully charged (meter connected to AC / DC adapter)




- battery capacity (no external adapter)



- battery near 0% (no external adapter)



- battery exhausted (no external adapter)



To conserve battery, the meter will turn off automatically after 15 minutes of inactivity (30 minutes after a Zero measurement). If a photometer measurement is on the screen, an auto-log is created before shutdown.

5.2. MODE SELECTION

The HI83303 has two operational modes: Photometer and Probe.
Photometer mode enables on-demand measurement of a cuvette using the integrated optical system.
Probe mode enables continuous measurement using a Hanna Instruments digital electrode connected to the 3.5 mm port.
To switch between Photometer mode and Probe mode, use the **MODE** key.


***Note**: The active mode cannot be switched while in Setup, Recall or Method menus.*


5.3. GENERAL SETUP

Press the **SETUP** key to enter in **Setup** menu, highlight desired option using the ▲▼ keys and press **Select**.

CAL Check™ (Photometer Mode Only)

Press **Select** to enter the CAL Check screen. The date, time and values for the last CAL Check are displayed on the screen. To start a new CAL Check press **Check** and follow the prompts on the screen. See Meter Validation & CAL Check™ for additional information.






Temperature Unit (Probe Mode Only)

Option: °C or °F


Press the functional key to select the desired temperature unit.




Backlight

Values: 0 to 8

Press **Modify** to access the backlight intensity. Use the functional keys or the ◀▶ keys to increase or decrease the value. Press **Accept** to confirm or press the **ESC** key to return to the **Setup** menu without saving the new value.







Contrast

Values: 0 to 20

Press **Modify** to change the display's contrast. Use the functional keys or the ◀▶ keys to increase or decrease the value. Press **Accept** to confirm the value or the **ESC** key to return to the **Setup** menu without saving the new value.





Date & Time

Press **Modify** to change the date and time. Press the functional keys or the ◀▶ keys to highlight the value to be modified (year, month, day, hour, minute or second). Use the ▲▼ keys to change the value. Press **Accept** to confirm or **ESC** key to return to the **Setup** without saving the new date or time.






Time Format

Option: AM/PM or 24-hour


Press the functional key to select the desired time format.




Date Format

Option: DD/MM/YYYY, MM/DD/YYYY, YYYY/MM/DD, YYYY-MM-DD, Mon DD, YYYY, DD-Mon-YYYY, YYYY-Mon-DD

Press **Modify** to change the date format. Use the ▲▼ keys to select the desired format. Press **Select** to confirm or the **ESC** key to return to the **Setup** menu without saving the new format.






Decimal Separator

Option: Comma (,) or Period (.)

Press the functional key to select the desired decimal separator. The decimal separator is used on the measurement screen and CSV (Comma-Separated Values) files.



Language

Option: Português, Deutsch, English, Español, Français, Italiano, Dutch

Press **Modify** to change the language. Use the ▲▼ keys to select the desired language. Press **Select** to change the language.



Beeper

Option: Enable or Disable


When enabled, a short beep is heard every time a key is pressed. A long beep alert sounds when the pressed key is not active or an error is detected. Press the functional key to enable or disable the beeper.



Instrument ID


Option: 0 to 999999

This option is used to set the instrument's ID (identification number). Press **Modify** to access the instrument ID screen. Use the functional keys or the ◀▶ keys to highlight the digit to be modified. Press the ▲▼ keys in order to set the desired value. Press **Accept** to confirm the value or press the **ESC** key to return to the **Setup** menu without saving the new value.




Meter Information

Press **Select** to view the model, serial number, firmware version and selected language. Press the **ESC** key to return to the **Setup** menu.



Probe Information (Probe Mode Only)

Press **Select** to view model number, serial number and firmware version for the connected probe. Press the **ESC** key to return to the **Setup** menu.






5.4. CONTEXTUAL HELP

HI83303 offers an interactive contextual help mode that assists the user at any time.

To access the help screen press the **HELP** key. The instrument will display additional information related to the current screen. To read all the available information, scroll the text using the ▲▼ keys. Press the **ESC** key to return to the previous screen.




6. LOGGING DATA & DATA MANAGEMENT


The instrument features a data log function to help the user to keep track of measurements. The data log can hold 1000 individual measurements. Storing, viewing and deleting the data is possible using the **LOG** and **RECALL** keys.

6.1. LOGGING DATA

Press the **LOG** key and the last valid measurement will be stored with a date and time stamp. Only valid measurements can be stored.










6.2. ADDING SAMPLE & USER NAMES TO LOG DATA

A sample ID and user ID can be added to the saved log. Use the ▲▼ keys to highlight the Sample ID or User ID then press **Modify**. Sample ID and user ID are entered using the alphanumeric multi-tapping keypad.



Enter one character at a time by pressing the key with the assigned character repeatedly until the desired character is highlighted. For reference, a list of the characters available for the current key will be shown under the text box. The character will be entered after a two-second delay or after another key is pressed.






Press **Accept** to update the sample or user ID.
Press ◀ functional key to delete the last character.
Press **Clear** to delete all of the characters.
Press the **ESC** key to discard all changes and return to the previous screen.


6.3. DATA MANAGEMENT

Viewing & Deleting

Data can be viewed, deleted and exported to a USB drive or a PC by pressing the **RECALL** key. Use the ▲▼ keys to scroll through the saved logs. Press **Info** to view additional information about the selected log.

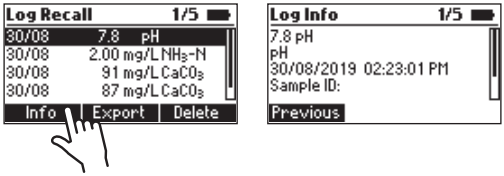


Use **Delete** to erase logged data. After pressing **Delete** the prompt on the display will confirm the action.

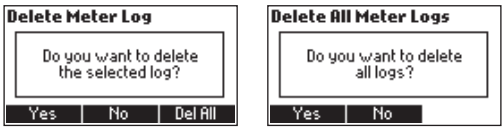

Press **No** or the **ESC** key to return to the previous screen.
Press **Yes** to delete the selected log.
Press **Del All** to erase all the logged data. If **Del All** is pressed the prompt on the display will confirm the action. Press **Yes** to delete all logged data, **No** or the **ESC** key to return to the log recall.

Data Export

Log data can be exported to a USB flash drive or to a PC. To access data export functions, press the **RECALL** key then **Export**.

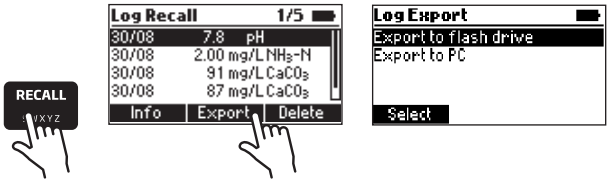


Use the ▲▼ keys to select the desired export location.
For export to flash drive, insert the USB flash drive into the dedicated port at the back of the meter labeled HOST USB, then follow the on-screen prompts.
For export to PC, connect the meter to a PC using the supplied micro-USB cable. Insert the cable into the port at the back of the meter labeled PC PWR. Follow the on-screen prompts. When the display informs that the PC is connected, the meter will appear as a removable disk. Use a file manager (such as Windows Explorer or Mac Finder) to move the file from the meter to the PC.
Log data is exported as a single file (HI83303.csv) containing all logged photometer and probe data. The CSV file may be opened with a text editor or spreadsheet application.

7. PHOTOMETER MODE

7.1. METHOD SELECTION

In order to select the desired method press the **METHOD** key and a screen with the available methods will appear. Press the ▲▼ keys to highlight the desired method. Press **Select**.

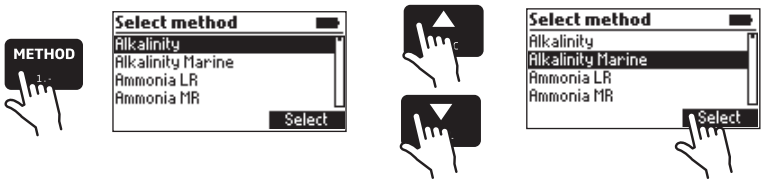


After the desired method is selected, follow the procedure described in the related section.
Before performing a method, read all the instructions carefully.

7.2. COLLECTING & MEASURING SAMPLES AND REAGENTS


Proper Use of Powder Packet

1. Use scissors to open the powder packet.
2. Push the edges of the packet to form a spout.
3. Pour out the content of the packet.

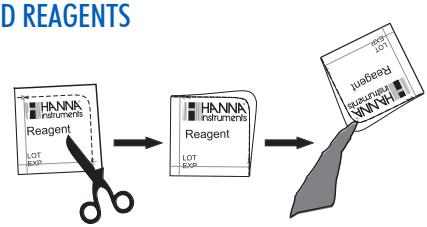


Proper Use of Dropper Bottle

1. Tap the dropper on the table several times.
2. Remove the cap and wipe the outside of the tip with a cloth.
3. Keep the dropper bottle in a vertical position while dosing the reagent.

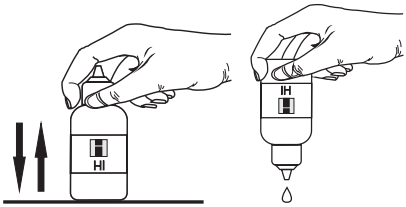

Proper Use of Syringe


1. Push the plunger completely into the syringe and insert the tip into the solution.
2. Pull the plunger up until the lower edge of the seal is exactly on the mark for the desired volume.
3. Take out the syringe and clean the outside of the syringe tip, be sure that no drops are hanging on the tip of the syringe. Then, keeping the syringe in a vertical position, push the plunger down into the syringe, the desired volume has been delivered.

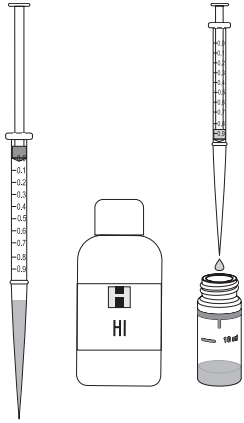


7.3. CUVETTE PREPARATION

Proper mixing is very important for reproducibility of the measurements. The proper mixing technique for each method is listed in the method procedure.

(a) Invert the cuvette a couple of times or for a specified time: hold the cuvette in the vertical position. Turn the cuvette upside-down and wait for all of the solution to flow to the cap end, then return the cuvette to the upright vertical position and wait for all of the solution to flow to the cuvette bottom. This is one inversion. The correct speed for this mixing technique is 10 to 15 complete inversions in 30 seconds. This mixing technique is indicated with "invert to mix" and one of the following icons:

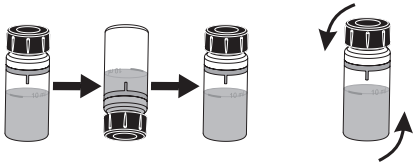

(b) Shaking the cuvette, moving the cuvette up and down. The movement may be gentle or vigorous. This mixing technique is indicated with "shake gently" or "shake vigorously", and one of the following icons:

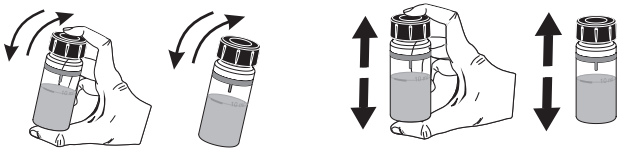

shake gently shake vigorously

(c) Swirl the cuvette gently to mix the solution. This mixing technique is indicated with one of the following icons:




In order to avoid reagent leaking and to obtain more accurate measurements, close the cuvette first with the supplied High-Density Polyethylene (HDPE) plastic stopper  and then the black cap.



Whenever the cuvette is placed into the measurement holder, it must be dry outside and free of fingerprints, oil and dirt. Wipe it thoroughly with HI731318 microfiber cleaning cloth or a lint-free wipe prior to insertion.

Shaking the cuvette can generate bubbles in the sample, causing higher readings. To obtain accurate measurements, remove such bubbles by swirling or by gently tapping the cuvette.



Do not let the reacted sample stand too long after reagent is added. For best accuracy, respect the timings described in each specific method.
It is possible to take multiple readings in a row, but it is recommended to take a new zero reading for each sample and to use the same cuvette for zeroing and measurement when possible.
Discard the sample immediately after the reading is taken, or the glass might become permanently stained.
All the reaction times reported in this manual are at 25 °C (77 °F). In general, the reaction time should be increased for temperatures lower than 20 °C (68 °F) and decreased for temperatures higher than 25 °C (77 °F).

Interferences


In the method measurement section the most common interferences that may be present in a typical water sample have been reported. It is possible that a particular application could introduce other compounds that will also interfere.


7.4. TIMERS & MEASUREMENT FUNCTIONS

Each method requires a different preparation procedure, reaction times and sample preparations. If a timer or timers are necessary for proper sample preparation, the **Timer** will be available.
To use a reaction timer, press **Timer**. The default timer will start immediately. To stop and reset the timer, press **Stop**.
If the selected method requires more than one timer, the meter will automatically select each timer in the appropriate order. To bypass the default order, a different timer may be activated by pressing the desired key (only while the current timer is stopped). Press **Continue** to start the active timer.
For some methods, the timer is only necessary after a Zero measurement has been performed. In this case, the timer key will only be available after the Zero measurement has been performed.
If the method requires a Zero or Read measurement after a timer has expired, the meter will automatically perform the appropriate action. Follow the instructions in the method procedure.
To perform a Zero or Read measurement, insert the prepared cuvette, then press **Zero** or **Read**. A Zero measurement must be conducted before a Read measurement.

7.5. CHEMICAL FORMULA & UNIT CONVERSION

Chemical formula and unit conversion factors are pre-programmed into the instrument and are method specific. In order to view the displayed result in the desired chemical formula press the ▲▼ keys to access the second level function and then press **Chem Frm** to toggle between the available chemical formulas for the selected method.






7.6. METER VALIDATION & CAL CHECK™

***Warning**: Do not validate the meter with standard solutions other than the Hanna Instruments® CAL Check Standards. For accurate validation results, please perform tests at room temperature, 18 to 25 °C (64.4 to 77.0 °F).*


Validation of the HI83303 involves absorbance measurements of certified Hanna Instruments CAL Check Standards (see Accessories section). The CAL Check screen guides the user through the measurement of each CAL Check Standard and applies the factory calibration corrections to each measurement. The HI83303 stores the results of the most recent CAL Check measurements which may be viewed on the CAL Check screen. Compare these results with the values printed on the Certificate provided with each Hanna Instruments CAL Check Standards kit.


To perform a validation:






1. Press the **SETUP** key.
2. Highlight **CAL Check**, then press **Select**.
3. Follow the prompts on the screen. The meter will prompt to measure each cuvette provided in the Hanna Instruments CAL Check Standards kit. To exit the process at any time, press **ESC** key.







4. Press the **ESC** key to return in **Setup** menu.



7.7. ABSORBANCE MEASUREMENTS

Raw absorbance measurements may be performed on the HI83303 for personal or diagnostic purposes. For example, the stability of a reagent blank may be monitored by occasionally measuring its absorbance versus deionized water.

To measure the raw absorbance of a prepared sample:




1. Press the **METHOD** key.
2. Highlight the appropriate Absorbance method (according to the wavelength to be used), then press **Select**. Absorbance methods are located at the bottom of the method list.
3. Prepare the sample cuvette according to the method.
4. Insert a cuvette filled with deionized water, then press **Zero**.
5. Insert the prepared sample cuvette, then press **Read**.

***Warning**: Never use absorbance methods for validation using Hanna Instruments CAL Check cuvettes. The factory calibration corrections for CAL Check cuvettes are applied while in CAL Check mode only!*

8. PROBE MODE

8.1. pH MEASUREMENT

The HI83303 can be used to perform direct pH measurements by connecting a Hanna Instruments® digital pH electrode with a 3.5 mm TRRS connector. Connect the electrode to the 3.5 mm port marked with EXT PROBE located at the rear of the meter. If the meter is in Photometer mode, set the meter to Probe mode by pressing the **MODE** key.




Press **Calibrate** to open the calibration window.
Press **GLP** to review the calibration information.
Press **Range** to switch between pH and mV.
For high accuracy it is recommended to calibrate the electrode often. pH electrodes should be recalibrated at least once per week, but daily calibration is recommended. Always recalibrate after cleaning an electrode, see pH Calibration section for more information.
To take pH measurements:

- Remove the protective cap and rinse the electrode with water.
- Collect some sample in a clean, dry beaker.
- Preferably, rinse the electrode with a small amount of sample.
- Submerse the electrode tip approximately 3 cm (1¼") into the sample to be tested and stir the sample gently. Make sure the electrode junction is completely submersed.
- Allow time for the electrode to stabilize in the sample. When the ⧗ symbol disappears, the reading is stable.

If measurements are taken successively in different samples, it is recommended to rinse the electrodes thoroughly with deionized or distilled water and then with some of the next sample to prevent cross-contamination.
pH measurements are affected by temperature. Hanna Instruments digital pH electrodes include a built-in temperature sensor and automatically calculate corrected pH values. The measured temperature is displayed on the screen with the pH measurements.

8.2. pH CALIBRATION

From the probe measurement screen, press **Calibrate** to begin the calibration process. During pH calibration, the display will show the current pH reading, temperature reading, selected buffer type and the buffer number ("Buffer: 1" for the first buffer, "Buffer: 2" for the second buffer).

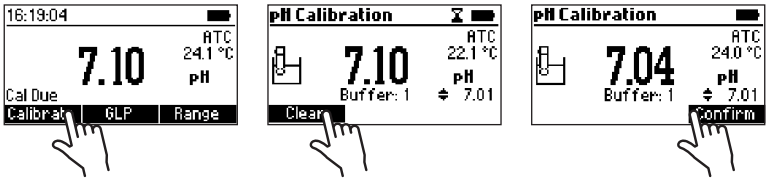

Press **Clear** to clear the current calibration.
Press **Confirm** to accept the current calibration point (only available if the reading is stable and within the limits for the selected buffer).
Press the ▲▼ keys to cycle through the list of available buffers: pH 4.01, 6.86, 7.01, 9.18, 10.01.
Press the **ESC** key to exit calibration and return to pH measurement mode.


Preparation

Pour small quantities of the buffer solutions into clean beakers. If possible, use plastic beakers to minimize any EMC interferences. For accurate calibrations and to minimize cross-contamination, use two beakers for each buffer solution: one for rinsing the electrode and one for calibration. If the sample to be measured is in the acidic range, use pH 7.01 or 6.86 as the first buffer and pH 4.01 as the second buffer. If it is in the alkaline range, use pH 7.01 or 6.86 as the first buffer and pH 10.01 or 9.18 as the second buffer.

Procedure


Calibration can be performed using one or two calibration buffers. For more accurate measurements, a two-point calibration is recommended.
Submerse the pH electrode approximately 3 cm (1¼") into a buffer solution and stir gently.
When the reading is stable and close to the selected buffer, press **Confirm** to accept and store the calibration point. The meter will prompt for the second buffer (Buffer: 2). To use only a one-point calibration, press the **ESC** key to exit calibration mode. The meter will store the calibration information to the probe and return to measurement mode. To continue calibrating with a second buffer, rinse and submerse the pH electrode approximately 3 cm (1¼") into the second buffer solution and stir gently. If necessary, use the ▲▼ keys to select a different buffer value.
When the reading is stable and close to the selected buffer, press **Confirm** to accept and store the second calibration point.
The meter will store the two-point calibration information to the probe and return to Measurement mode. The list of calibrated buffers will appear at the bottom of the screen.

8.3. pH MESSAGES & WARNINGS




No Probe

No probe is connected or the probe is broken.




Connecting

The meter has detected a probe and is reading the probe configuration and calibration information.




Incompatible Probe

The connected probe is not compatible with this device.




Incompatible Calibration

The probe's current calibration is not compatible with this meter. The calibration must be cleared to use this probe.




Exceeded Probe Range

The pH and / or temperature measurement exceed the specifications of the probe. The measurement value(s) will be blinking.




Broken Temperature Sensor

The temperature sensor inside the probe is broken. Temperature compensation will revert to a fixed value of 25 °C (77 °C).




Cal Due

The probe has no calibration. See pH Calibration section for details.




Clean Probe

The offset is outside the accepted window or the slope is under the accepted lower limit. Cleaning the probe will improve the pH electrode's response, repeat the calibration after cleaning. See pH Electrode Conditioning & Maintenance section for details.



Check Probe & Buffer

There is a large difference between the pH measurement and the selected buffer value or the electrode slope is outside of the accepted slope limit. Clean the probe and confirm the correct buffer selection.




Wrong Temperature


The buffer temperature is outside of the acceptable window for the selected buffer value.


8.4. pH GLP

Good Laboratory Practice (GLP) refers to a quality control function used to ensure uniformity and consistency of sensor calibrations and measurements. To view the GLP information, press the **GLP** key from the probe measurement screen.



The pH GLP screen displays the date and time, buffers, slope and offset for the last calibration. If the probe has not been calibrated, "No User Calibration" is displayed. Press the **ESC** key to return to the measurement mode.





8.5. pH ELECTRODE CONDITIONING & MAINTENANCE

Remove the protective cap. Do not be alarmed if salt deposits are present, this is normal. Rinse the probe with water.

Shake the electrode alike a clinical thermometer to eliminate any air bubbles inside the glass bulb. If the bulb and / or junction are dry, soak the electrode in HI70300 or HI80300 Storage solution for a minimum of 30 minutes. Rinse with water. Calibrate before using.

For refillable electrodes if the filling solution (electrolyte) is more than 2½ cm (1") below the fill hole, add HI7082 or HI8082 3.5M KCl Electrolyte solution. Unscrew the fill hole cover during measurements so the liquid reference junction maintains an outward flow of electrolyte.

Storage Procedure

To minimize clogging and ensure a quick response time, the glass bulb and the junction should be kept moist and not allowed to dry out.

Replace the solution in the protective cap with a few drops of HI70300 or HI80300 Storage solution or Filling solution (HI7082 or HI8082 3.5M KCl Electrolyte solution). pH 4.01 or 7.01 buffer can also be used.

***Note**: Never store the electrode in distilled or deionized water.*

Periodic Maintenance

Inspect the electrode and the cable. The cable used for connection to the instrument must be intact and there must be no points of broken insulation on the cable, connectors must be perfectly clean and dry. If there are any scratches or cracks on the electrode stem or bulb, replace the electrode.


For refillable electrodes, refill the reference chamber with fresh electrolyte (HI7082 or HI8082 3.5M KCl Electrolyte solution). Allow the electrode to stand upright for 1 hour.

Cleaning Procedure

Several cleaning solutions are available:

- General – Soak in HI7061 or HI8061 General cleaning solution for approximately 30 minutes.
- Protein –Soak in HI7073 or HI8073 Protein cleaning solution for 15 minutes.
- Inorganic – Soak in HI7074 Inorganic cleaning solution for 15 minutes.
- Oil and grease – Rinse with HI7077 or HI8077 Oil and fat cleaning solution.

After performing any of the cleaning procedures, rinse the electrode thoroughly with distilled water, refill the reference chamber with fresh electrolyte (refillable electrodes only) and soak the electrode in HI70300 or HI80300 Storage solution for at least 1 hour before taking measurements.

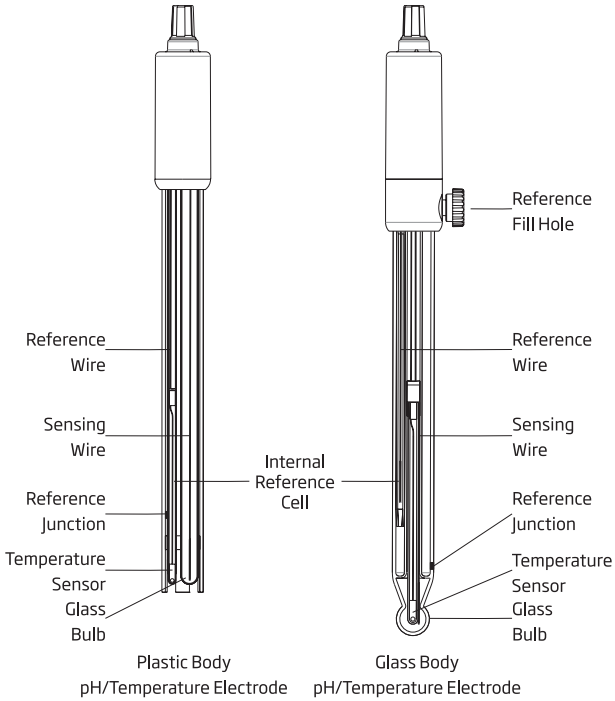

Temperature Correlation for pH Sensitive Glass

Verify the temperature range by reading the limits on electrode's cap. The pH electrode's life is temperature dependent. If constantly cycled between two temperatures, the life of the electrode is drastically reduced.

9. METHOD PROCEDURES

9.1. ALKALINITY

SPECIFICATIONS

Range	0 to 500 mg/L (as $CaCO_3$)
Resolution	1 mg/L
Accuracy	±5 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Colorimetric Method

REQUIRED REAGENTS

Code	Description	Quantity
HI775S	Alkalinity Reagent	1 mL
HI93755-53	Chlorine Removal Reagent	1 drop

REAGENT SETS

HI775-26 Reagents for 25 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Alkalinity method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

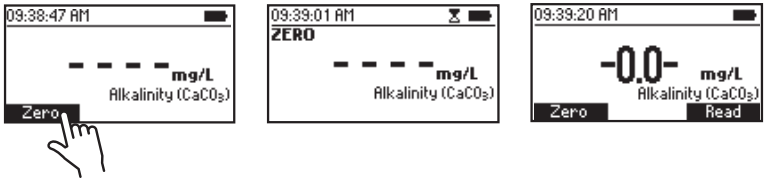


- Remove the cuvette.


- Add 1 mL of HI775S Alkalinity Reagent to the sample using a 1 mL syringe.

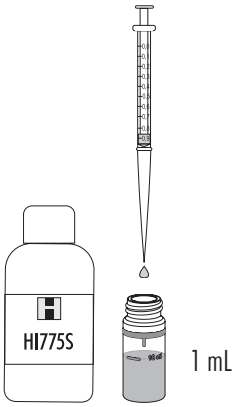


- Replace the plastic stopper and the cap. Invert 5 times.



- Insert the cuvette into the holder and close the lid.



- Press **Read** to start the reading. The instrument displays the results in **mg/L calcium carbonate ($CaCO_3$)**.

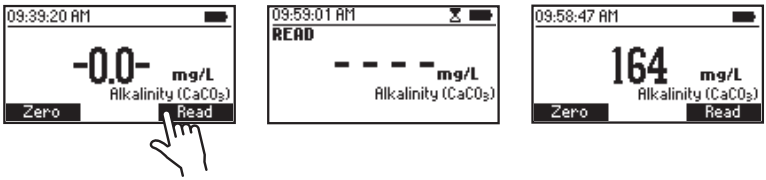

INTERFERENCES

Interference may be caused by:

- Chlorine must be absent, to remove the interference add one drop of HI93755-53 Chlorine Removal Reagent to the unreacted sample

9.2. ALKALINITY, MARINE

SPECIFICATIONS

Range	0 to 300 mg/L (as $CaCO_3$)
Resolution	1 mg/L
Accuracy	±5 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Colorimetric Method

REQUIRED REAGENTS

Code	Description	Quantity
HI755S	Alkalinity Reagent	1 mL

REAGENT SETS

HI755-26 Reagents for 25 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Alkalinity Marine method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

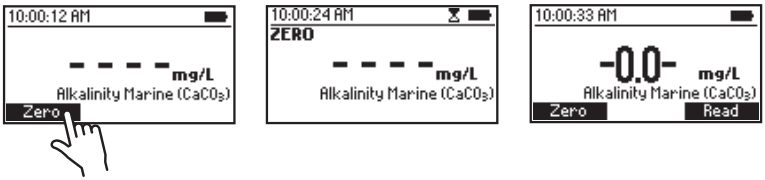


- Remove the cuvette.



- Add 1 mL of HI755S Alkalinity Reagent to the sample using a 1 mL syringe.




- Replace the plastic stopper and the cap. Invert 5 times.




- Insert the cuvette into the holder and close the lid.

- Press **Read** to start the reading. The instrument displays the results in **mg/L** as **calcium carbonate ($CaCO_3$)**.

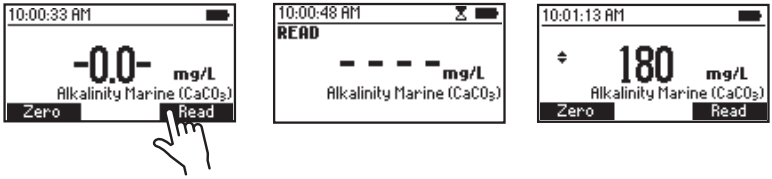

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to degree **KH (dKH)**.

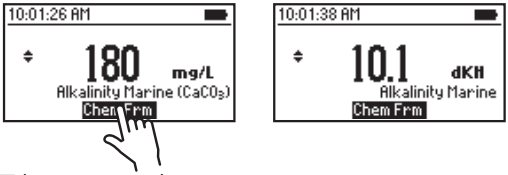

- Press the ▲ or ▼ key to return to the measurement screen.

9.3. AMMONIA, MARINE (NH_3 / NH_4^+)

SPECIFICATIONS

Range	0.00 to 2.50 ppm (as NH_3)
Resolution	0.01ppm
Accuracy	±0.05 ppm ±5% of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Adaptation of the Salicylate Method. The Reaction between Ammonia and Ammonium and the reagent causes a blue-green tint in the sample.

REQUIRED REAGENTS

Code	Description	Quantity
HI784A-0	Marine Ammonia Reagent A	1 mL
HI784B-0	Marine Ammonia Reagent B	1 packet
HI784C-0	Marine Ammonia Reagent C	1 packet

REAGENT SETS

HI784-25	Reagents for 25 tests

For other accessories see Accessories section.


SAMPLING PROCEDURE


Prepared sample cuvette (sample plus reagents) must be 18 to 29 °C (65 to 85 °F).
Warm or cool prepared cuvettes if needed.

MEASUREMENT PROCEDURE


- Select the Ammonia Marine method using the procedure described in the Method Selection section.
- Use a 1 mL syringe to dispense 1 mL of HI784A-0 Marine Ammonia Reagent A into a clean, dry cuvette.


  ***Caution**: HI784A-0 is corrosive! Dispense liquid slowly and avoid contact with skin and eyes!*
- Using scissors, open one packet of HI784B-0 Marine Ammonia Reagent B along the dotted line. Push the two corners together to make a spout. Add the content of the packet to the cuvette.
- Use a pipette to fill the cuvette to the 10 mL mark with unreacted sample.
- Replace the plastic stopper and the cap. Shake gently until the powder is completely dissolved (60-90 seconds).
  Do NOT shake vigorously – this will cause more air bubbles!
  For the most accurate reading, ensure all reagent is dissolved and there are no visible bubbles. Ensure the outside of the cuvette is dry and clean.

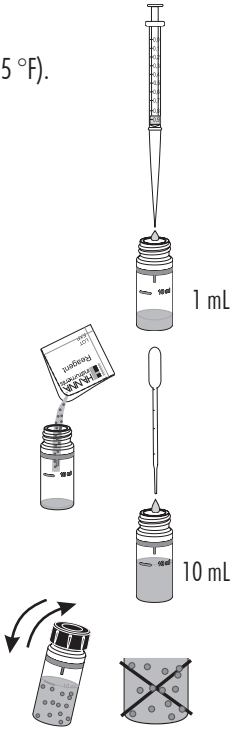



- Let the cuvette stand for 30 seconds. This allows complete dissipation of micro-bubbles.
- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

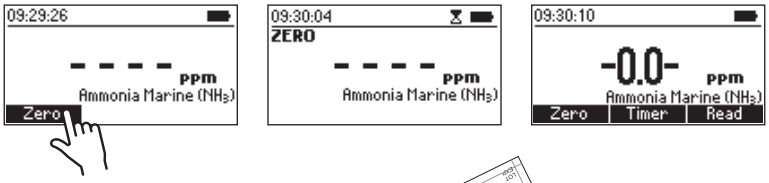

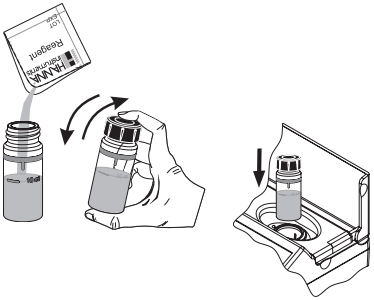

- Remove the cuvette.
- Using scissors, open one packet of HI784C-0 Marine Ammonia Reagent C along the dotted line. Push the two corners together to make a spout. Add the content of the packet to the cuvette. Replace the plastic stopper and the cap. Shake gently to dissolve the powder (30 seconds).
- Insert the cuvette into the holder and close the lid.
- Press **Timer** and the display will show a 15 minute countdown prior to the measurement or wait 15 minutes and press **Read**. When the timer ends, the meter will perform the reading. The instrument displays the ammonia/ammonium concentration in **ppm NH_3**.



To calculate the unionized ammonia (NH_3) concentration, use the conversion table.

CALCULATING UNIONIZED TOXIC AMMONIA

This method measures NH_3 / NH_4^+.

To determine the toxic NH_3 portion, use the table to determine the percentage of toxic NH_3. Levels of toxic NH_3 greater than 0.01 ppm have a negative effect on fish. Multiply total ammonia (NH_3 / NH_4^+) by the percent unionized ammonia from the table to determine unionized toxic ammonia.

Example:

pH 8.0, Temperature: 24 °C (75 °F), NH_3 / NH_4^+ 1.00 ppm

Unionized toxic ammonia: 1.00 ppm × (5.0 ÷ 100) = 0.05 ppm

Percentage of Unionized Ammonia (NH_3)

pH	21 °C (70 °F)	24 °C (75 °F)	26 °C (79 °F)	29 °C (84 °F)
7.4	1.1	1.3	1.5	1.9
7.6	1.7	2.1	2.4	2.9
7.8	2.6	3.2	3.7	4.5
8.0	4.1	5.0	5.8	7.0
8.2	6.3	7.7	8.8	11
8.4	9.7	12	13	16
8.6	15	17	20	23
8.8	21	25	28	32

9.4. AMMONIA LOW RANGE

SPECIFICATIONS

Range	0.00 to 3.00 mg/L (as NH_3-N)
Resolution	0.01 mg/L
Accuracy	±0.04 mg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 420 nm
Method	Adaptation of the ASTM Manual of Water and Environmental Technology, D1426 Nessler Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93700A-0	Ammonia Low Range Reagent A	4 drops
HI93700B-0	Ammonia Low Range Reagent B	4 drops

REAGENT SETS

HI93700-01	Reagents for 100 tests
HI93700-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Ammonia LR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.





- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.








- Remove the cuvette.
- Add 4 drops of HI93700A-0 Ammonia Low Range Reagent A. Replace the plastic stopper and the cap. Swirl to mix the solution.




- Add 4 drops of HI93700B-0 Ammonia Low Range Reagent B. Replace the plastic stopper and the cap. Swirl to mix the solution.

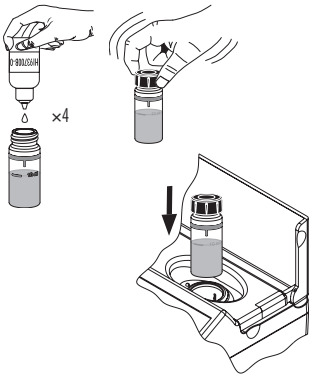


- Insert the cuvette into the holder and close the lid.

- Press **Timer** and the display will show the countdown prior to the measurement or wait 3 minutes and 30 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **ammonia nitrogen (NH_3-N)**.

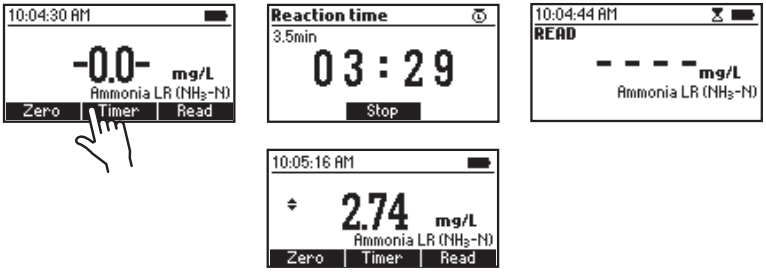

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **ammonia (NH_3)** and **ammonium (NH_4^+)**.

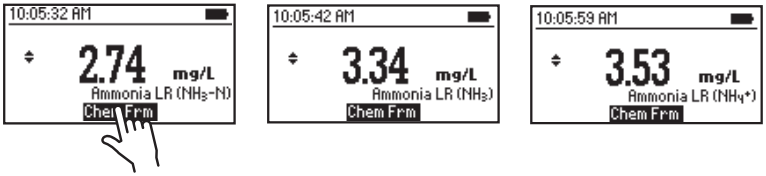

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Hardness above 1 g/L
- Iron
- Sulfide may cause turbidity
- Organic compounds like acetone above 0.1 %, alcohols, aldehydes, aliphatic and aromatic amines, chloramines, glycine, or urea above 10 mg/L, to remove the interference distillation is required

9.5. AMMONIA MEDIUM RANGE

SPECIFICATIONS

Range	0.00 to 10.00 mg/L (as NH_3-N)
Resolution	0.01 mg/L
Accuracy	±0.05 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 420 nm
Method	Adaptation of the ASTM Manual of Water and Environmental Technology, D1426, Nessler Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93715A-0	Ammonia Medium Range Reagent A	4 drops
HI93715B-0	Ammonia Medium Range Reagent B	4 drops

REAGENT SETS

HI93715-01	Reagents for 100 tests
HI93715-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Ammonia MR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.




- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

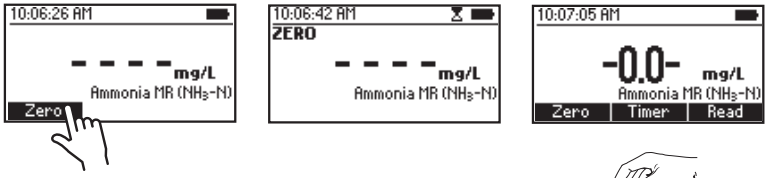


- Remove the cuvette.
- Add 4 drops of HI93715A-0 Ammonia Medium Range Reagent A. Replace the plastic stopper and the cap. Swirl to mix the solution.




- Add 4 drops of HI93715B-0 Ammonia Medium Range Reagent B. Replace the plastic stopper and the cap. Swirl to mix the solution.




- Insert the cuvette into the holder and close the lid.




- Press **Timer** and the display will show the countdown prior to the measurement or wait 3 minutes and 30 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **ammonia nitrogen (NH_3-N)**.












- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **ammonia (NH_3)** and **ammonium (NH_4^+)**.







- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Hardness above 1 g/L
- Iron
- Sulfide may cause turbidity
- Organic compounds like acetone above 0.1 %, alcohols, aldehydes, aliphatic and aromatic amines, chloramines, glycine, or urea above 10 mg/L, to remove the interference distillation is required

9.6. AMMONIA HIGH RANGE

SPECIFICATIONS

Range	0.0 to 100.0 mg/L (as NH_3-N)
Resolution	0.1 mg/L
Accuracy	±0.5 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 420 nm
Method	Adaptation of the ASTM Manual of Water and Environmental Technology, D1426, Nessler Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93733A-0	Ammonia High Range Reagent A	4 drops
HI93733B-0	Ammonia High Range Reagent B	9 mL


REAGENT SETS

HI93733-01	Reagents for 100 tests
HI93733-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Ammonia HR method using the procedure described in the Method Selection section.
- Add 1 mL of unreacted sample to the cuvette using a 1 mL syringe.
- Use the pipette to fill the cuvette up to the 10 mL mark with HI93733B-0 Ammonia High Range Reagent B. Replace the plastic stopper and the cap. Swirl to mix the solution.
- Insert the cuvette into the holder and close the lid.

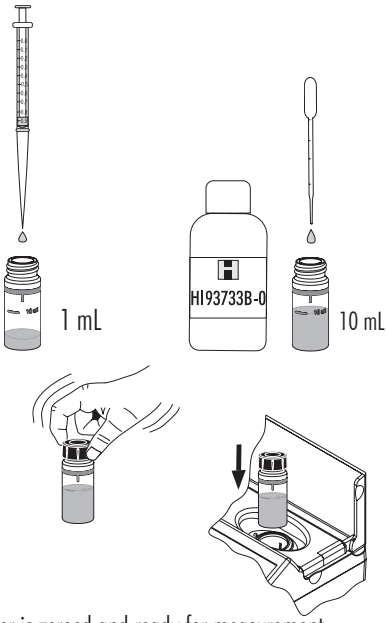


- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

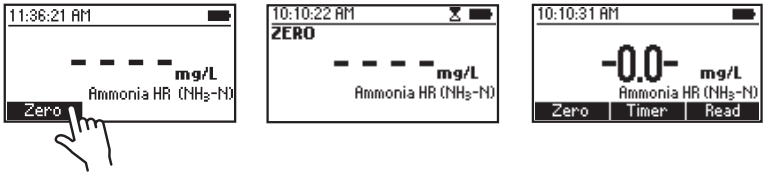

- Remove the cuvette.
- Add 4 drops of HI93733A-0 Ammonia High Range Reagent A. Replace the plastic stopper and the cap. Swirl to mix the solution.




- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 3 minutes and 30 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **ammonia nitrogen (NH_3-N)**.



- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **ammonia (NH_3)** and **ammonium (NH_4^+)**.

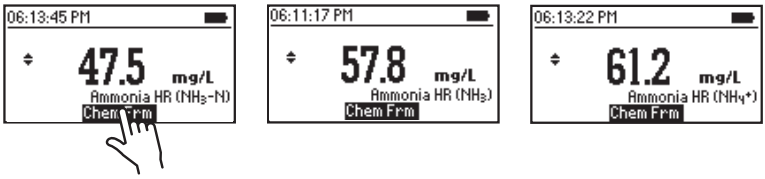

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Hardness above 1 g/L
- Iron
- Sulfide may cause turbidity
- Organic compounds like acetone above 0.1 %, alcohols, aldehydes, aliphatic and aromatic amines, chloramines, glycine, or urea above 10 mg/L, to remove the interference distillation is required

9.7. CALCIUM

SPECIFICATIONS

Range	0 to 400 mg/L (as Ca^{2+})
Resolution	1 mg/L
Accuracy	±10 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 466 nm
Method	Adaptation of the Oxalate Method

REQUIRED REAGENTS

Code	Description	Quantity
–	Buffer Reagent	4 drops
HI93752A-Ca	Calcium Reagent A	7 mL
HI93752B-Ca	Calcium Reagent B	1 mL


REAGENT SETS

HI937521-01	Reagents for 50 tests
HI937521-03	Reagents for 150 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE

- Select the Calcium method using the procedure described in the Method Selection section.
- Add 3 mL of unreacted sample to the cuvette using the 5 mL syringe.
- Use the pipette to fill the cuvette up to the 10 mL mark with the HI93752A-Ca Calcium Reagent A.
- Add 4 drops of Buffer Reagent.
- Replace the plastic stopper and the cap. Invert several times to mix.
- Insert the cuvette into the holder and close the lid.

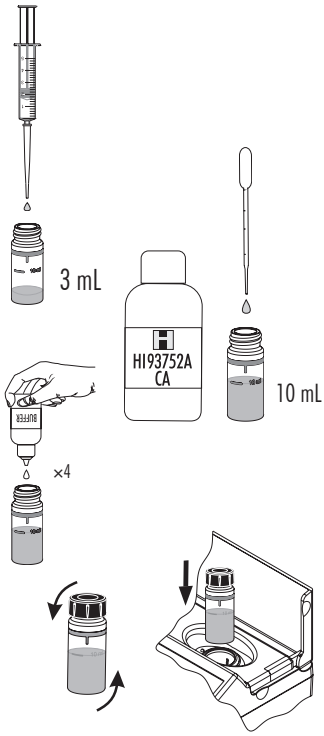


- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

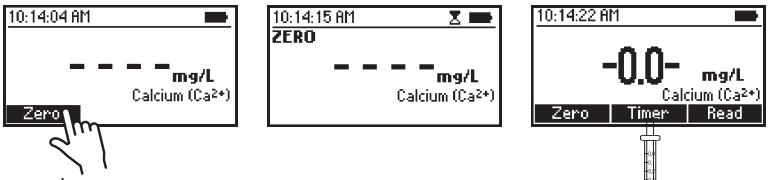


- Remove the cuvette.


- Add 1 mL of HI93752B-Ca Calcium Reagent B to the sample using the 1 mL syringe. Replace the plastic stopper and the cap. Invert the cuvette 10 times to mix (about 15 seconds).




- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 5 minutes.

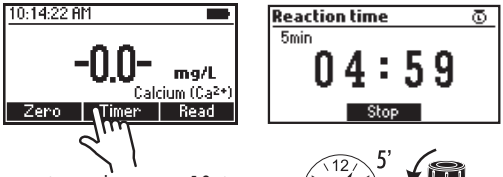


- After waiting 5 minutes, invert the cuvette 10 times to mix (about 15 seconds).

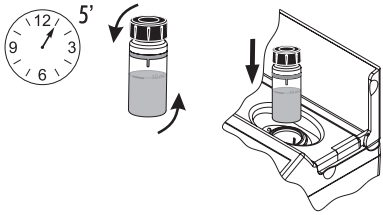

- Insert the cuvette into the holder and close the lid.

- Press **Read** to start the reading. The instrument displays the results in **mg/L** of **calcium (Ca^{2+})**.

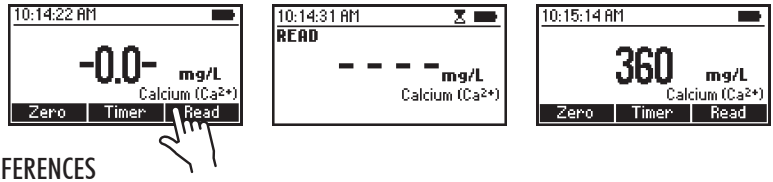

INTERFERENCES

Interference may be caused by:

- Acidity, Alkalinity above 1000 mg/ L $CaCO_3$
- Magnesium above 400 mg/L

9.8. CALCIUM, MARINE

SPECIFICATIONS

Range	200 to 600 mg/L (as Ca^{2+})
Resolution	1 mg/L
Accuracy	±6 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Adaptation of the Zincon Method

REQUIRED REAGENTS

Code	Description	Quantity
HI7581	Calcium Reagent A	1 mL
HI7582	Calcium Reagent B	1 packet


REAGENT SETS

HI758-26 Reagents for 25 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Calcium Marine method using the procedure described in the Method Selection section.



- Add 1 mL of HI7581 Calcium Reagent A to the cuvette using a 1 mL syringe.




- Use the plastic pipette to fill the cuvette to the 10 mL mark with deionized water. Replace the plastic stopper and the cap. Invert 3 to 5 times to mix.



- Insert the cuvette into the holder and close the lid.

- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

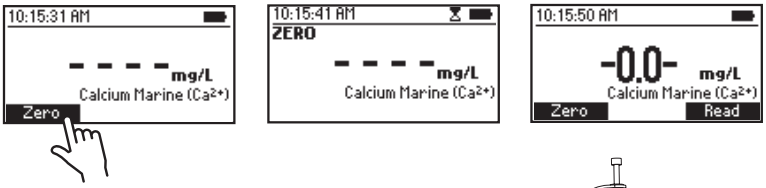


- Remove the cuvette.


- Use the minipipette to add 0.1 mL of sample to the cuvette.




- Add one packet of HI7582 Calcium Reagent B. Replace the plastic stopper and the cap and shake vigorously for 15 seconds or until the powder is completely dissolved. Allow air bubbles to dissipate for 15 seconds before taking a reading.



- Insert the cuvette into the holder and close the lid.



- Press **Read** to start the reading. The instrument displays the results in **mg/L** of **calcium (Ca^{2+})**.

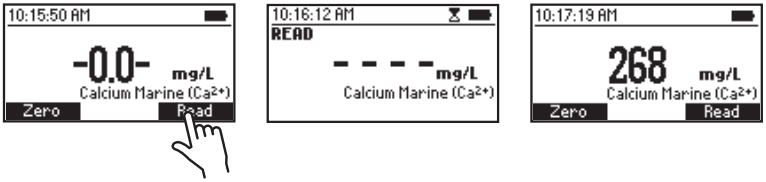

9.9. CHLORINE, FREE

SPECIFICATIONS

Range	0.00 to 5.00 mg/L (as Cl_2)
Resolution	0.01 mg/L
Accuracy	±0.03 mg/L ±3 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Adaptation of the EPA DPD Method 330.5

REQUIRED REAGENTS

POWDER

Code	Description	Quantity
HI93701-0	Free Chlorine Reagent	1 packet

LIQUID


Code	Description	Quantity
HI93701A-F	Free Chlorine Reagent A	3 drops
HI93701B-F	Free Chlorine Reagent B	3 drops

REAGENT SETS


HI93701-F	Reagents for 300 tests (liquid)
HI93701-01	Reagents for 100 tests (powder)
HI93701-03	Reagents for 300 tests (powder)

For other accessories see the Accessories section.

MEASUREMENT PROCEDURE




- Select the Chlorine (Free) method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.
- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

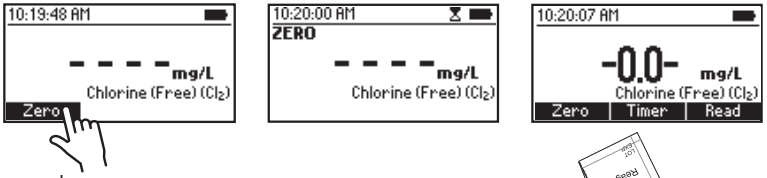

- Remove the cuvette.

POWDER REAGENT PROCEDURE


- Add the content of one packet of HI93701-0 Free Chlorine Reagent. Replace the plastic stopper and the cap. Shake gently for 20 seconds.



- Insert the cuvette into the holder and close the lid.
- Press **Timer** and the display will show the countdown prior to the measurement or wait 1 minute and press **Read.** When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **chlorine (Cl_2)**.




LIQUID REAGENT PROCEDURE



- To an empty cuvette add 3 drops of HI93701A-F Free Chlorine Reagent A and 3 drops of HI93701B-F Free Chlorine Reagent B.
- Replace the plastic stopper and the cap. Swirl gently to mix.
- Add unreacted sample up to the 10 mL mark. Replace the plastic stopper and the cap. Shake gently.



- Insert the cuvette into the holder and close the lid.
- Press **Read** to start the reading. The instrument displays the results in **mg/L** of **chlorine (Cl_2)**.

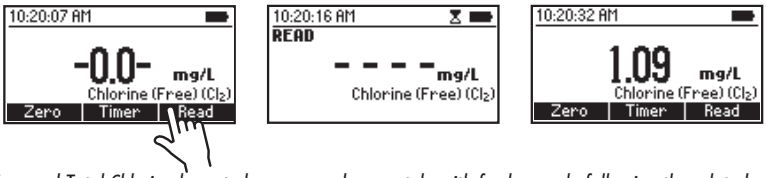

***Note**: Free and Total Chlorine have to be measured separately with fresh sample following the related procedure if both values are desired.*

INTERFERENCES

Interference may be caused by:

- Bromine, Iodine, Oxidized forms of Chromium and Manganese, Ozone
- Hardness greater than 500 mg/L $CaCO_3$, to remove the interference shake the sample for approximately 2 minutes after adding the powder reagent
- Alkalinity greater than 250 mg/L $CaCO_3$ or acidity value greater than 150 mg/L $CaCO_3$, the color of the sample may develop only partially or rapidly fade, to remove the interference neutralize the sample with diluted HCl or NaOH

9.10. CHLORINE, TOTAL

SPECIFICATIONS

Range	0.00 to 5.00 mg/L (as Cl_2)
Resolution	0.01 mg/L
Accuracy	±0.03 mg/L ±3 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Adaptation of the EPA DPD Method 330.5

REQUIRED REAGENTS

POWDER

Code	Description	Quantity
HI93711-0	Total Chlorine Reagent	1 packet

LIQUID

Code	Description	Quantity
HI93701A-T	Total Chlorine Reagent A	3 drops
HI93701B-T	Total Chlorine Reagent B	3 drops
HI93701C-T	Total Chlorine Reagent C	1 drop


REAGENT SETS


HI93701-T	Reagents for 300 tests (liquid)
HI93711-01	Reagents for 100 total tests (powder)
HI93711-03	Reagents for 300 total tests (powder)

For other accessories see the Accessories section.

MEASUREMENT PROCEDURE

- Select the Chlorine (Total) method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.
- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.




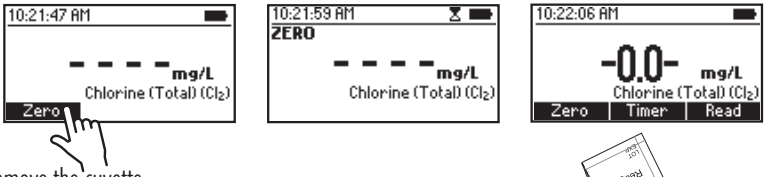

- Remove the cuvette.

POWDER REAGENT PROCEDURE


- Add 1 packet of HI93711-0 Total Chlorine Reagent. Replace the plastic stopper and the cap. Shake gently for 20 seconds.
- Insert the cuvette into the holder and close the lid.




- Press **Timer** and the display will show the countdown prior to the measurement or wait 2 minutes and 30 seconds and press **Read.** When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **chlorine (Cl_2).**



LIQUID REAGENT PROCEDURE



- To an empty cuvette add 3 drops of HI93701A-T Total Chlorine Reagent A, 3 drops of HI93701B-T Total Chlorine Reagent B and 1 drop of HI93701C-T Total Chlorine Reagent C.
- Replace the plastic stopper and the cap. Swirl gently to mix.
- Add unreacted sample up to the 10 mL mark. Replace the plastic stopper and the cap. Shake gently.
- Insert the cuvette into the holder and close the lid.
- Press **Timer** and the display will show the countdown prior to the measurement or wait 2 minutes and 30 seconds and press **Read.** When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **chlorine (Cl_2).**

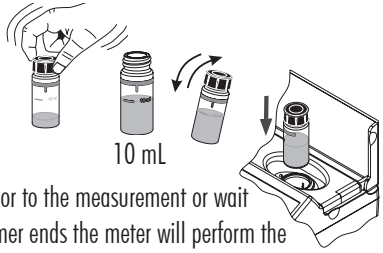



***Note**: Free and Total Chlorine have to be measured separately with fresh unreacted samples following the related procedure if both values are desired.*

INTERFERENCES

Interference may be caused by:

- Bromine, Iodine, Oxidized forms of Chromium and Manganese, Ozone
- Hardness greater than 500 mg/L $CaCO_3$, to remove the interference shake the sample for approximately 2 minutes after adding the powder reagent
- Alkalinity greater than 250 mg/L $CaCO_3$ or acidity greater than 150 mg/L $CaCO_3$, the color of the sample may develop only partially or may rapidly fade, to remove the interference neutralize the sample with diluted HCl or NaOH

9.11. COPPER LOW RANGE

SPECIFICATIONS

Range	0.000 to 1.500 mg/L (as Cu^{2+})
Resolution	0.001 mg/L
Accuracy	±0.010 mg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 575 nm
Method	Adaptation of the EPA Method

REQUIRED REAGENTS

Code	Description	Quantity
HI95747-0	Copper Low Range Reagent	1 packet

REAGENT SETS

HI95747-01	Reagents for 100 tests
HI95747-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Copper LR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.




- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

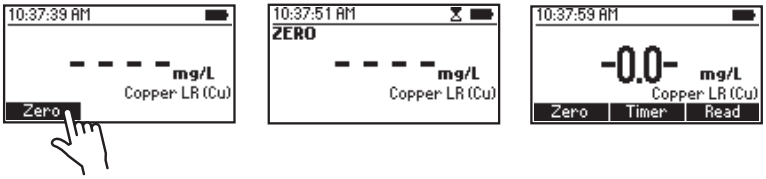


- Remove the cuvette.
- Add one packet of HI95747-0 Copper Low Range Reagent. Replace the plastic stopper and the cap. Shake gently for about 15 seconds.




- Insert the cuvette into the holder and close the lid.




- Press **Timer** and the display will show the countdown prior to the measurement or wait 45 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **copper (Cu)**.









INTERFERENCES

Interference may be caused by:

- Cyanide, Silver
- For samples overcoming buffering capacity of reagent around pH 6.8, pH should be adjusted between 6 and 8

9.12. COPPER HIGH RANGE

SPECIFICATIONS

Range	0.00 to 5.00 mg/L (as Cu^{2+})
Resolution	0.01 mg/L
Accuracy	±0.02 mg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 575 nm
Method	Adaptation of the EPA Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93702-0	Copper High Range Reagent	1 packet

REAGENT SETS


HI93702-01 Reagents for 100 tests
HI93702-03 Reagents for 300 tests
For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Copper HR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.




- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

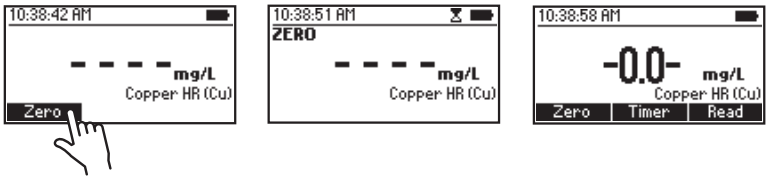

- Remove the cuvette.



- Add one packet of HI93702-0 Copper High Range Reagent. Replace the plastic stopper and the cap. Shake gently for about 15 seconds.



- Insert the cuvette into the holder and close the lid.

- Press **Timer** and the display will show the countdown prior to the measurement or wait 45 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **copper (Cu)**.



INTERFERENCES

Interference may be caused by:

- Cyanide, Silver
- For samples overcoming buffering capacity of reagent around pH 6.8, pH should be adjusted between 6 and 8

9.13. MAGNESIUM, MARINE

SPECIFICATIONS

Range	1000 to 1800 mg/L (as Mg^{2+})
Resolution	5 mg/L
Accuracy	±5% of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Adaptation of Colorimetric EDTA Method using calmagite indicator

REQUIRED REAGENTS

Code	Description	Quantity
HI783A-0	Marine Magnesium Reagent A	4 mL
HI783IND-0	Marine Magnesium Indicator Reagent	1 packet

REAGENT SETS

HI783-25 Reagents for 25 tests

For other accessories see Accessories section.


SAMPLING PROCEDURE

Prepared sample cuvette (sample plus reagents) must be 22 to 28 °C (72 to 82 °F).
Warm or cool prepared cuvettes if needed. Temperature affects accuracy. Handle cuvette by cap to avoid transferring heat from hands through the glass.

MEASUREMENT PROCEDURE


- Select the Magnesium Marine method using the procedure described in the Method Selection section.
- Ensure cuvettes, syringes, and tips are completely clean and dry before use.
- Place the syringe tips onto each syringe. Ensure the O-rings remain in the tip for a proper seal.
- Use the 5 mL syringe (with black printing) to measure 4 mL of HI783A-0 reagent. Ensure there is no excess reagent on the syringe tip, then slowly dispense the 4 mL of reagent into a clean, dry cuvette. If excessive reagent remains in the tip, draw a small amount of air into the syringe and use it to expel the remaining reagent into the cuvette.
- Use the 5 mL syringe (with blue printing) to measure 5 mL of unreacted sample. Ensure there is no excess sample on the syringe tip, then slowly dispense the sample into the same cuvette. Ensure no sample is remaining in the tip.


  ***Note**: The total liquid volume will be below the 10 mL mark at this step.*




4 mL 5 mL


- Replace the plastic stopper and the cap. Gently invert the cuvette 5 times until the solution has been thoroughly mixed. Ensure there are no bubbles in the mixture and that the outside of the cuvette is dry and clean.





- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

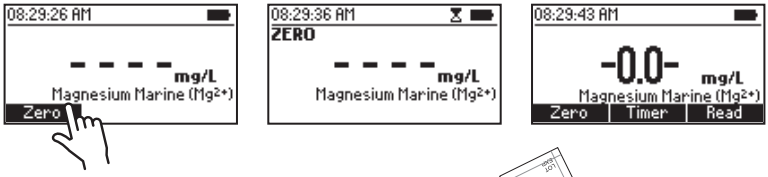

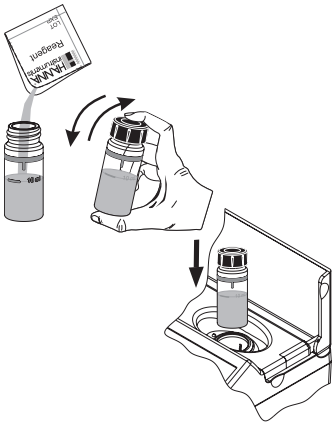

- Remove the cuvette.
- Unscrew the cap and add the content of one packet of HI783IND-0 Marine Magnesium Indicator Reagent. Ensure all powder is added to the sample, loss of powder will result in false high readings.
- Replace the plastic stopper and the cap.
- Shake gently for 30 seconds.
- Insert the cuvette into the holder and close the lid.
- Press **Timer** and the display will show the countdown prior to measurement or wait 3 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **magnesium (Mg^{2+})**.



- Rinse cuvettes, caps, syringes, and tips thoroughly with deionized (RODI) water and allow to dry completely before storing.

INTERFERENCES

Interference may be caused by:

- Calcium below 300 mg/L and above 500 mg/L

9.14. NITRATE

SPECIFICATIONS

Range	0.0 to 30.0 mg/L (as NO_3^-- N)
Resolution	0.1 mg/L
Accuracy	±0.5 mg/L ±10 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Adaptation of the Cadmium Reduction Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93728-0	Nitrate Reagent	1 packet

REAGENT SETS

HI93728-01	Reagents for 100 tests
HI93728-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Nitrate method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of sample (up to the mark). Replace the plastic stopper and the cap.





- Insert the cuvette into the holder and close the lid.



- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.









- Remove the cuvette and add one packet of HI93728-0 Nitrate Reagent.




- Replace the plastic stopper and the cap. Shake vigorously up and down for exactly 10 seconds. Continue to mix by inverting the cuvette gently for 50 seconds, while taking care not to induce air bubbles. Powder will not completely dissolve.




***Note**: The method is technique sensitive. See procedure described in the Cuvette Preparation section for proper mixing technique.*




- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 4 minutes and 30 seconds and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **nitrate-nitrogen (NO_3-N)**.

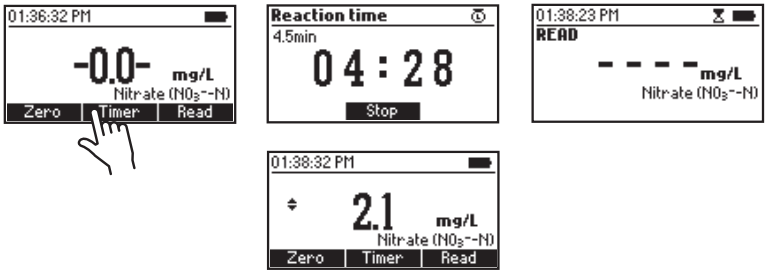

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **nitrate (NO_3^-)**.

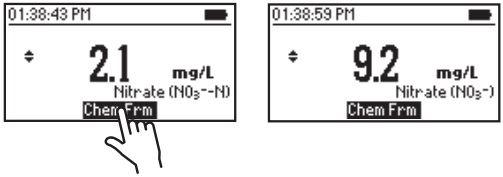

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Ammonia and amines, as urea and primary aliphatic amines
- Chloride above 100 mg/L
- Chlorine above 2 mg/L
- Copper, Iron (Ferric), Strong oxidizing and reducing substances
- Sulfide must be absent

9.15. NITRATE, MARINE LOW RANGE

SPECIFICATIONS

Range	0.00 to 5.00 ppm (as NO_3^-)
Resolution	0.01 ppm
Accuracy	±0.25 ppm ±2 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Zinc Reduction Method
	Reaction between nitrate and the reagent causes a pink tint in the sample.

REQUIRED REAGENTS

Code	Description	Quantity
HI781A-0	Marine Nitrate LR Reagent A	4 mL
HI781B-0	Marine Nitrate LR Reagent B	1 packet
HI781C-0	Marine Nitrate LR Reagent C	1 packet

REAGENT SETS

HI781-25	Reagents for 25 tests

For other accessories see Accessories section.

PREPARE THE FILTER HOLDER ASSEMBLY

1. Unscrew the two halves of the reusable filter holder and carefully place one paper filter on the lower piece. The upper piece is marked 'TOP'; the lower piece has no marking.
   Ensure the filter paper is on top of the clear colorless gasket in the filter holder.
2. Thread the upper piece over the lower piece and tighten securely. Ensure that the paper filter is not overlapping the threads. The filter holder assembly is now ready for use.

Cleaning

To clean zinc powder residue from the filter holder assembly:

1. Unscrew the filter holder and gently pop the small ridged disk out of the upper half.
   If necessary, use a small bristle brush and detergent.
2. Rinse thoroughly with Reverse Osmosis Deionized water (RODI) or tap water.
3. Dry before use.

FILTRATION & DILUTION

Filtering

To prevent the filter from tearing:

- Ensure that the filter and filter holder are dry before use.
- During filtering, keep a constant light pressure on the syringe plunger; it should take about 30 seconds for full filtration. Do not use excessive force.

Dilution

1. Measure 1 mL of sample using HI740143 1 mL graduated syringe.
2. Dispense into mixing vial.
3. Add nitrate/nitrite-free artificial seawater up to the 10 mL mark using HI740157P droppers.
4. Cap the vial and mix.
5. Attach the blunt needle to the 10 mL syringe. To attach, screw the covered blunt needle and remove the cap to expose opening.
6. Draw 7 mL of diluted sample into syringe and discard remaining 3 mL of sample from the mixing vial.
7. Dispense 7 mL of diluted sample back into the empty mixing vial.


Continue with the normal procedure by adding HI781A-0. Multiply results by 10.

***Note**: Measurement accuracy will be affected by dilution. Measure dilution volumes carefully!*


MEASUREMENT PROCEDURE

- Select the Nitrate, Marine LR method using the procedure described in the Method Selection section.


***Note**: For samples containing 5-50 ppm nitrate, follow the dilution procedure.*



- Use a 10 mL syringe and measure exactly 7 mL of sample into a mixing cuvette (# 1).
- Use a 5 mL syringe and add exactly 4 mL of HI781A-0 Marine Nitrate LR Reagent into the mixing cuvette.




- Add the content of one packet of HI781B-0 Marine Nitrate LR Reagent into the mixing cuvette. Replace the plastic stopper and cap. Shake vigorously for 1 minute.
- Remove the cap of the mixing cuvette. Thread the covered needle onto the 10 mL syringe, remove the plastic cover and draw up the contents of the mixing cuvette into the syringe.
- Cover the needle with plastic cover and twist to remove. Add the filter to filter holder assembly and attach to the 10 mL syringe using the threaded connection. Hold the syringe and filter holder assembly over a cuvette (# 2).
- Very slowly, push the plunger into the 10 mL syringe until the 10 mL cuvette has been filled up to the 10 mL mark. Replace the plastic stopper and the cap.




- Insert the cuvette into the holder and close the lid.


- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

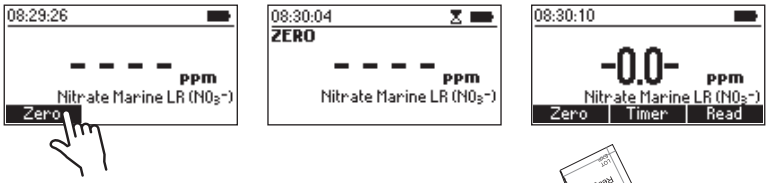

- Remove the cuvette.
- Add the content of one packet of HI781C-0 Marine Nitrate LR Reagent. Replace the plastic stopper and the cap. Shake vigorously for 2 minutes.



- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 8 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays concentration in **ppm** of **nitrate (NO_3^-)**.



- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result in mg/L of nitrate-nitrogen NO_3^- – N.
- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Nitrite, Copper

9.16. NITRATE, MARINE HIGH RANGE

SPECIFICATIONS

Range	0.0 to 75.0 ppm (as NO_3^-)
Resolution	0.1 ppm
Accuracy	±2.0 ppm ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Zinc Reduction Method
	Reaction between nitrate and the reagent causes a pink tint in the sample.

REQUIRED REAGENTS

Code	Description	Quantity
HI782-0	Marine Nitrate HR Reagent	1 packet

REAGENT SETS

HI782-25 Reagents for 25 tests


For other accessories see Accessories section.

MEASUREMENT PROCEDURE


- Select the Nitrate, Marine HR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.





- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.








- Remove the cuvette.
- Add the content of one packet of HI782-0 Marine Nitrate HR Reagent. Replace the plastic stopper and the cap. Shake vigorously for 2 minutes.





- Insert the cuvette into the holder and close the lid.

- Press **Timer** and the display will show the countdown prior to the measurement or wait 7 minutes and press **Read.** When the timer ends the meter will perform the reading. The instrument displays concentration in **ppm** of **nitrate (NO_3^-)**.



- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result in mg/L of nitrate-nitrogen NO_3^- – N.
- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Nitrite

9.17. NITRITE, MARINE ULTRA LOW RANGE

SPECIFICATIONS

Range	0 to 200 µg/L (as NO_2^--N)
Resolution	1 µg/L
Accuracy	±10 µg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 466 nm
Method	Adaptation of the EPA Diazotization Method 354.1

REQUIRED REAGENTS

Code	Description	Quantity
HI764-25	Nitrite Ultra Low Range Reagent	1 packet

REAGENT SETS

HI764-25 Reagents for 25 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Nitrite, Marine ULR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.





- Insert the cuvette into the holder and close the lid.



- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.









- Remove the cuvette.

- Add one packet of HI764-25 Nitrite Ultra Low Range Reagent. Replace the plastic stopper and the cap. Shake gently for about 15 seconds.

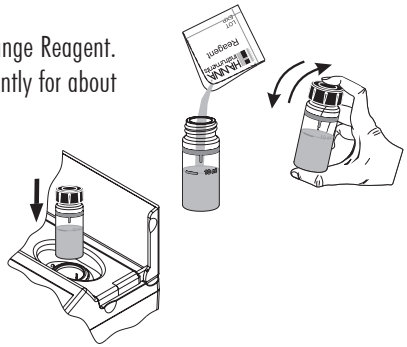


- Insert the cuvette into the holder and close the lid.

- Press **Timer** and the display will show the countdown prior to the measurement or wait 15 minutes and press **Read.** When the timer ends the meter will perform the reading. The instrument displays concentration in µg/L of **nitrite-nitrogen (NO_2^--N).**

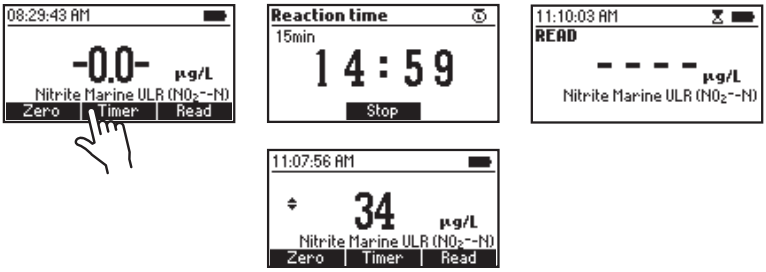

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to µg/L of **nitrite (NO_2^-)** and **sodium nitrite ($NaNO_2$).**

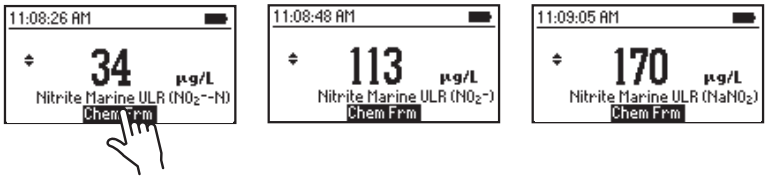

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Antimonious, Auric, Bismuth, Chloroplatinate ions, Cupric, Iron (Ferric), Iron (Ferrous), Lead, Mercurous, Silver, Strong reducing or oxidating agents
- Nitrate above 100 mg/L could yield falsely high readings

9.18. NITRITE LOW RANGE

SPECIFICATIONS

Range	0 to 600 µg/L (as NO_2^--N)
Resolution	1 µg/L
Accuracy	±20 µg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 466 nm
Method	Adaptation of the EPA Diazotization Method 354.1

REQUIRED REAGENTS

Code	Description	Quantity
HI93707-0	Nitrite Low Range Reagent	1 packet

REAGENT SETS

HI93707-01	Reagents for 100 tests
HI93707-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Nitrite LR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

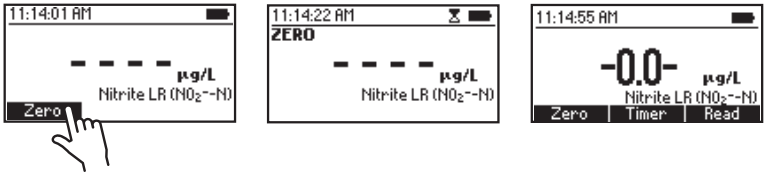


- Remove the cuvette.


- Add one packet of HI93707-0 Nitrite Low Range Reagent.
- Replace the plastic stopper and the cap. Shake gently for about 15 seconds.

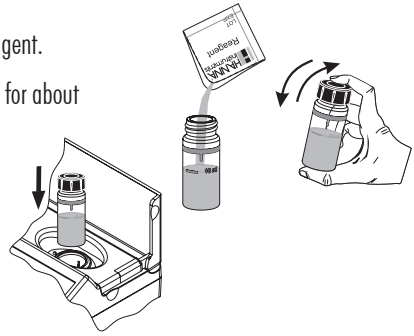

- Insert the cuvette into the holder and close the lid.
- Press **Timer** and the display will show the countdown prior to the measurement or wait 15 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays concentration in **µg/L** of **nitrite-nitrogen (NO_2^--N)**.

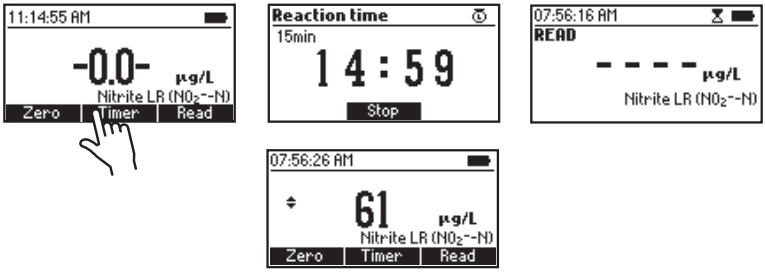

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **µg/L** of **nitrite (NO_2^-)** and **sodium nitrite ($NaNO_2$)**.

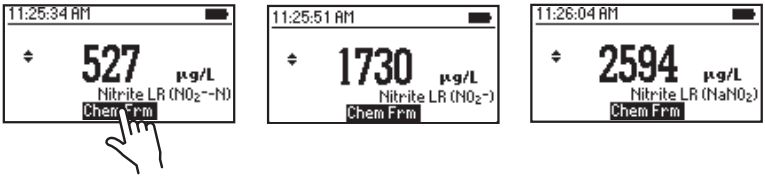

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Antimonious, Auric, Bismuth, Chloroplatinate ions, Cupric, Iron (Ferric), Iron (Ferrous), Lead, Mercurous, Silver, Strong reducing or oxidating agents
- Nitrate above 100 mg/L could yield falsely high readings

9.19. NITRITE HIGH RANGE

SPECIFICATIONS

Range	0 to 150 mg/L (as NO_2^-)
Resolution	1 mg/L
Accuracy	±4 mg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 575 nm
Method	Adaptation of the Ferrous Sulfate Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93708-0	Nitrite High Range Reagent	1 packet

REAGENT SETS

HI93708-01 Reagents for 100 tests
HI93708-03 Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the Nitrite HR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

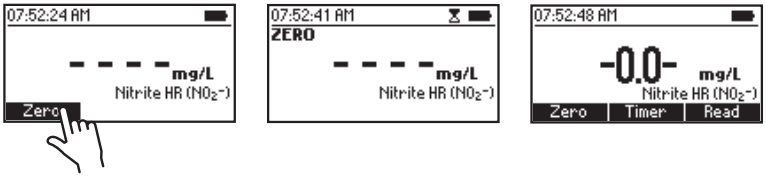


- Remove the cuvette.


- Add one packet of HI93708-0 Nitrite High Range Reagent. Replace the plastic stopper and the cap. Shake gently until completely dissolved.




- Insert the cuvette into the holder and close the lid.




- Press **Timer** and the display will show the countdown prior to the measurement or wait 10 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays concentration in **mg/L** of **nitrite (NO_2^-)**.












- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **nitrite-nitrogen (NO_2^--N)** and **sodium nitrite ($NaNO_2$)**.







- Press the ▲ or ▼ key to return to the measurement screen.

9.20. OXYGEN, DISSOLVED

SPECIFICATIONS

Range	0.0 to 10.0 mg/L (as O_2)
Resolution	0.1 mg/L
Accuracy	±0.4 mg/L ±3 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 420 nm
Method	Adaptation of Standard Methods for the Examination of Water and Wastewater, 18th Edition, Azide Modified Winkler Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93732A-0	Dissolved Oxygen Reagent A	5 drops
HI93732B-0	Dissolved Oxygen Reagent B	5 drops
HI93732C-0	Dissolved Oxygen Reagent C	10 drops


REAGENT SET

HI93732-01	Reagents for 100 tests
HI93732-03	Reagents for 300 tests

For other accessories see the Accessories section.


MEASUREMENT PROCEDURE

- Select the Oxygen (dissolved) method using the procedure described in the Method Selection section.
- Fill one 60 mL glass bottle completely with the unreacted sample.
- Replace the cap and ensure that a small part of the sample spills over.
- Remove the cap and add 5 drops of HI93732A-0 and 5 drops of HI93732B-0.
- Add more sample to fill the bottle completely. Replace the cap and ensure that a part of the sample spills over.




***Note**: This ensures no air bubbles have been trapped inside the bottle. Trapped air bubbles could alter readings.*

- Invert the bottle several times until the sample turns orange-yellow and a flocculating agent appears.
- Let the sample stand for approximately 2 minutes to allow flocculating agent to settle.
- When the upper half of the bottle is clear, add 10 drops of HI93732C-0 Dissolved Oxygen Reagent C.




- Replace the cap and invert the bottle until the settled flocculating agent dissolves completely. The sample is ready for measurement when it is yellow and completely clear.




- Fill the first cuvette (#1) with 10 mL of the unreacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.



- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

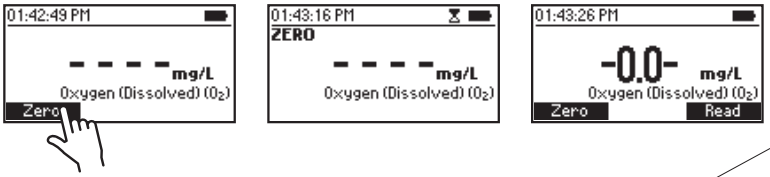


- Remove the cuvette.


- Fill second cuvette (#2) with 10 mL of the reacted sample (up to the mark). Replace the plastic stopper and the cap.



- Insert the cuvette into the holder and close the lid.



- Press **Read** to start the reading. The instrument will display the results in **mg/L** of **oxygen (O_2)**.

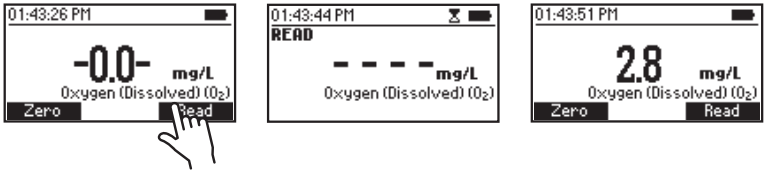

INTERFERENCES

Interference may be caused by:

- Reducing and oxidizing materials

9.21. pH

SPECIFICATIONS

Range	6.5 to 8.5 pH
Resolution	0.1 pH
Accuracy	±0.1 pH at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Adaptation of the Phenol Red Method

REQUIRED REAGENTS


Code	Description	Quantity
HI93710-0	pH Reagent	5 drops

REAGENT SETS


HI93710-01 Reagents for 100 tests
HI93710-03 Reagents for 300 tests
For other accessories see the Accessories section.

MEASUREMENT PROCEDURE


- Select the pH method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.
- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

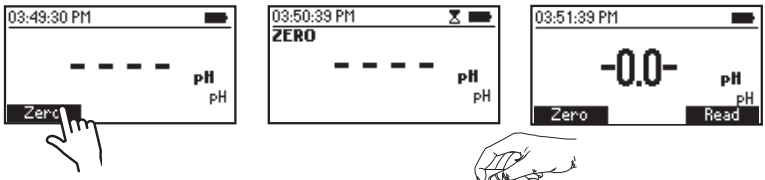

- Remove the cuvette and add 5 drops of HI93710-0 pH Reagent Indicator. Replace the plastic stopper and the cap and mix the solution.
- Insert the cuvette into the holder and close the lid.

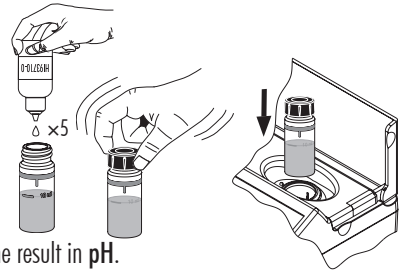

- Press **Read** to start the reading. The instrument displays the result in **pH**.

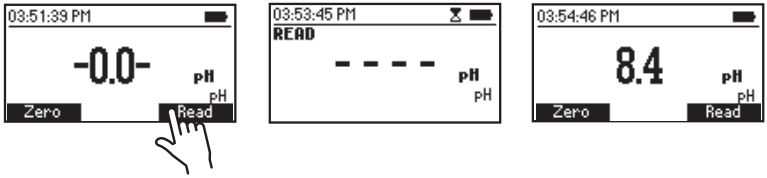

9.22. PHOSPHATE, MARINE ULTRA LOW RANGE

SPECIFICATIONS

Range	0 to 200 µg/L (as P)
Resolution	1 µg/L
Accuracy	±5 µg/L ±5 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Adaptation of Standard Methods for the Examination of Water and Wastewater, 20th Edition, Ascorbic Acid Method

REQUIRED REAGENTS

Code	Description	Quantity
HI736IND-0	Phosphorus Indicator Reagent	1 packet
SULFAMIC PWD	Sulfamic Reagent	1 packet
ALTERNATIVE REAGENT		
HI736-0	Phosphorus Ultra Low Range Reagent	1 packet


REAGENT SETS

HI736-25 Reagents for 25 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE

- Select the Phosphate Marine ULR method using the procedure described in the Method Selection section.
- Rinse and replace the plastic stopper and the cap. Shake the cuvette several times with unreacted sample.
- Fill the cuvette with 10 mL of sample (up to the mark). Replace the plastic stopper and the cap.
- Insert the cuvette into the holder and close the lid.




- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

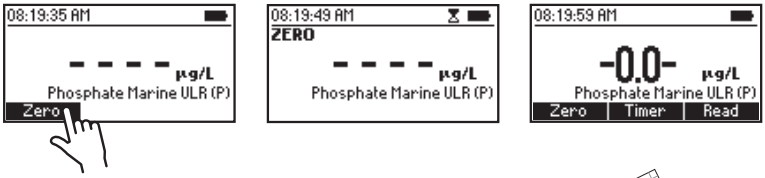


Reagent addition

- Begin by adding the content of the SULFAMIC PWD Sulfamic Reagent.
- Replace the plastic stopper and cap, then shake gently until the powder is completely dissolved.
- Remove the plastic stopper and cap, then add the content of one packet of HI736IND-0 Phosphorus Indicator Reagent.




Alternative reagent selection


Add the content of one single packet of HI736-0 Phosphorus Ultra Low Range Reagent.




- Replace the plastic stopper and the cap.
  Shake gently (for about 2 minutes) until the powder is completely dissolved.
- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 3 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays concentration in µg/L of **phosphorus (P)**.

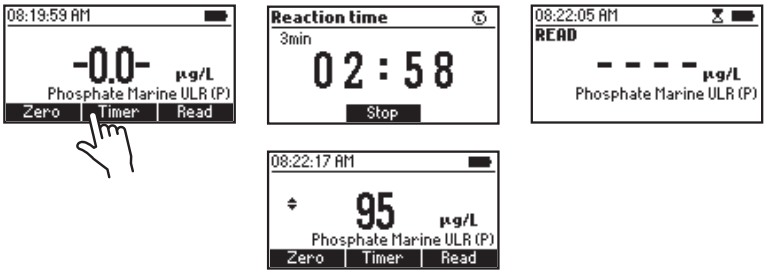

- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to µg/L of **phosphate (PO_4^{3-})** and **phosphorus pentoxide (P_2O_5)**.

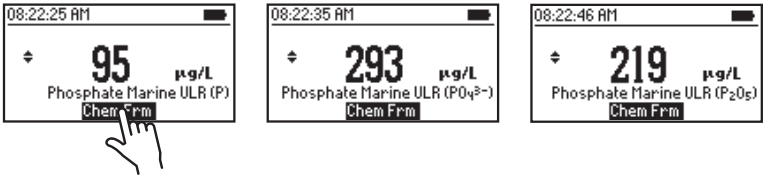

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Iron, Silica above 50 mg/L
- Copper, Silicate above 10 mg/L
- Hydrogen sulfide, arsenate, turbid sample and highly buffered samples

9.23. PHOSPHATE LOW RANGE

SPECIFICATIONS

Range	0.00 to 2.50 mg/L (as PO_4^{3-})
Resolution	0.01 mg/L
Accuracy	±0.04 mg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 610 nm
Method	Adaptation of the Ascorbic Acid Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93713-0	Phosphate Low Range Reagent	1 packet


REAGENT SETS

HI93713-01 Reagents for 100 tests
HI93713-03 Reagents for 300 tests
For other accessories see the Accessories section.


MEASUREMENT PROCEDURE


- Select the Phosphate LR method using the procedure described in the Method Selection section.
- Rinse and replace the plastic stopper and the cap. Shake the cuvette several times with unreacted sample.
- Fill the cuvette with 10 mL of sample (up to the mark). Replace the plastic stopper and the cap.







- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.








- Remove the cuvette and add the content of one packet of HI93713-0 Phosphate Low Range Reagent. Replace the plastic stopper and the cap. Shake gently (for about 2 minutes) until the powder is completely dissolved.




- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 3 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays concentration in **mg/L** of **phosphate (PO_4^{3-})**.



- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **phosphorus (P)** and **phosphorus pentoxide (P_2O_5)**.

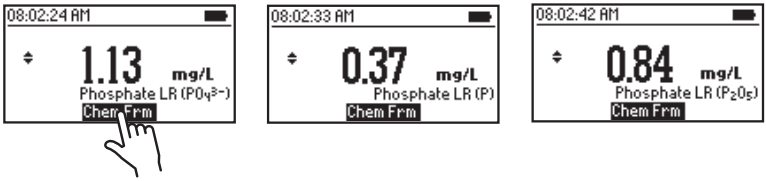

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Iron, Silica above 50 mg/L
- Copper, Silicate above 10 mg/L
- Arsenate, Highly buffered samples, Hydrogen sulfide, Turbid samples

9.24. PHOSPHATE HIGH RANGE

SPECIFICATIONS

Range	0.0 to 30.0 mg/L (as PO_4^{3-})
Resolution	0.1 mg/L
Accuracy	±1.0 mg/L ±4 % of reading at 25 °C
Light Source	LED with narrow band interference filter @ 525 nm
Method	Adaptation of Standard Methods for the Examination of Water and Wastewater, 18th Edition, Amino Acid Method

REQUIRED REAGENTS

Code	Description	Quantity
HI93717A-0	Phosphate High Range Reagent A	10 drops
HI93717B-0	Phosphate High Range Reagent B	1 packet


REAGENT SETS

HI93717-01	Reagents for 100 tests
HI93717-03	Reagents for 300 tests


For other accessories see the Accessories section.

MEASUREMENT PROCEDURE

- Select the Phosphate HR method using the procedure described in the Method Selection section.
- Fill the cuvette with 10 mL of unreacted sample (up to the mark). Replace the plastic stopper and the cap.




- Insert the cuvette into the holder and close the lid.
- Press **Zero**. The display will show "-0.0-" when the meter is zeroed and ready for measurement.

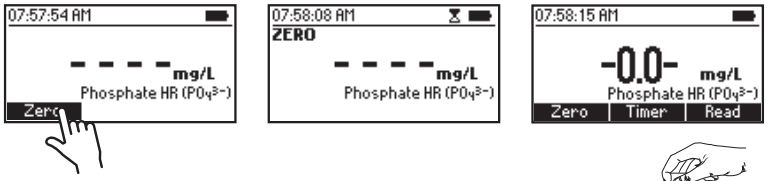


- Add 10 drops of HI93717A-0 Phosphate HR Reagent A.



- Add one packet of HI93717B-0 Phosphate HR Reagent B to the cuvette. Replace the plastic stopper and the cap. Shake gently until completely dissolved.




- Insert the cuvette into the holder and close the lid.



- Press **Timer** and the display will show the countdown prior to the measurement or wait 5 minutes and press **Read**. When the timer ends the meter will perform the reading. The instrument displays the results in **mg/L** of **phosphate (PO_4^{3-})**.



- Press the ▲ or ▼ key to access the second level functions.
- Press **Chem Frm** to convert the result to **mg/L** of **phosphorus (P)** and **phosphorus pentoxide (P_2O_5)**.

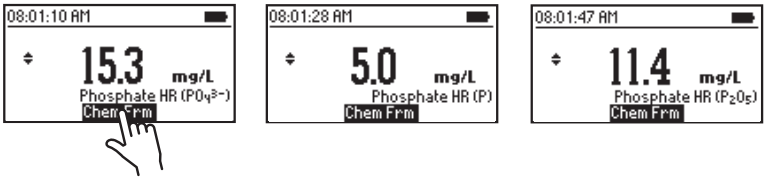

- Press the ▲ or ▼ key to return to the measurement screen.

INTERFERENCES

Interference may be caused by:

- Sulfide
- Chloride above 150000 mg/L
- Magnesium above 40000 mg/L $CaCO_3$
- Calcium above 10000 mg/L $CaCO_3$
- Iron (Ferrous) above 100 mg/L

10. WARNINGS & ERRORS

The instrument shows clear warning messages when erroneous conditions appear and when measured values are outside the expected range. The information below provides an explanation of the errors and warnings, and recommended action to be taken.



There is an excess amount of ambient light reaching the detector.
Make sure the lid is closed before performing any measurements. If the issue persists, please contact Hanna Instruments® technical support.



The sample and the zero cuvettes are inverted.
Swap the cuvettes and repeat the measurement.



There is either too much light or the instrument can not adjust the light level.
Please check the preparation of the zero cuvette and that the sample does not contain any debris.







The meter is either overheating or its temperature has dropped too low to operate within published accuracy specifications.
The meter must be between 0 and 50 °C (32 and 122 °F) to perform any measurements.



Meter temperature has changed significantly since the zero measurement has been performed.
The zero measurement must be performed again.



The measured value is outside the limits of the method.
If possible, change the method range. Verify that the sample does not contain any debris. Check the sample preparation and the measurement preparation.






The measured value cannot be calculated.
Please check sample preparation and measurement procedure.



Stored results of the CAL Check™ measurements have been lost.
Please redo the CAL Check measurements to ensure accurate results.



User settings have been lost.
Please reset the values. If the issue persists, please contact Hanna Instruments technical support.

	Flash drive is not recognized or it might be damaged. Please insert a new USB flash drive.
	Data log is full. Please review logged data and delete unnecessary logs.
	Date and time settings have been lost. Please reset the values. If the issue persists, please contact Hanna Instruments® technical support.
	Battery level is too low to ensure normal functioning and the meter will turn off. Connect the USB adapter to charge the battery.
	English is the only available language. Some features are no longer available. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.
	Real time clock is not accurate. Some features are no longer available. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.
	The device serial number can not be identified. Some features are no longer available. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.
	Logged data is no longer accessible. Some features are no longer available. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.
	Battery charge level is not accurate. Some features are no longer available. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.
	A critical error has occurred. Restart the meter. If the issue persists, please contact Hanna Instruments technical support.

11. STANDARD METHODS

Description	Range	Method
Alkalinity	0 to 500 mg/L (as $CaCO_3$)	Colorimetric
Alkalinity, Marine	0 to 300 mg/L (as $CaCO_3$)	Colorimetric
Ammonia Marine	0.00 to 2.50 ppm (as NH_3)	Salicylate
Ammonia LR	0.00 to 3.00 mg/L (as NH_3-N)	Nessler
Ammonia MR	0.00 to 10.00 mg/L (as NH_3-N)	Nessler
Ammonia HR	0.0 to 100.0 mg/L (as NH_3-N)	Nessler
Calcium	0 to 400 mg/L (as Ca^{2+})	Oxalate
Calcium Marine	200 to 600 mg/L (as Ca^{2+})	Zincon
Chlorine, Free	0.00 to 5.00 mg/L (as Cl_2)	DPD
Chlorine, Total	0.00 to 5.00 mg/L (as Cl_2)	DPD
Copper LR	0.000 to 1.500 mg/L (as Cu^{2+})	Bicinchoninate
Copper HR	0.00 to 5.00 mg/L (as Cu^{2+})	Bicinchoninate
Magnesium, Marine	1000 to 1800 mg/L (as Mg^{2+})	EDTA
Nitrate	0.0 to 30.0 mg/L (as NO_3^-- N)	Cadmium reduction
Nitrate, Marine LR	0.00 to 5.00 ppm (as NO_3^-)	Zinc reduction
Nitrate, Marine HR	0.0 to 75.0 ppm (as NO_3^-)	Zinc reduction
Nitrite, Marine ULR	0 to 200 μg/L (as NO_2^--N)	Diazotization
Nitrite LR	0 to 600 μg/L (as NO_2^--N)	Diazotization
Nitrite HR	0 to 150 mg/L (as NO_2^-)	Ferrous Sulfate
Oxygen, Dissolved	0.0 to 10.0 mg/L (as O_2)	Winkler
pH	6.5 to 8.5 pH	Phenol Red
Phosphate, Marine ULR	0 to 200 μg/L (as P)	Ascorbic Acid
Phosphate LR	0.00 to 2.50 mg/L (as PO_4^{3-})	Ascorbic Acid
Phosphate HR	0.0 to 30.0 mg/L (as PO_4^{3-})	Amino Acid

12. ACCESSORIES

12.1. REAGENT SETS

Ordering Information	Description
HI736-25	25 phosphate marine ULR tests
HI755-26	25 alkalinity marine tests
HI758-26	25 calcium marine tests
HI764-25	25 nitrite marine ULR tests
HI775-26	25 alkalinity fresh water tests
HI781-25	25 nitrate marine LR tests
HI782-25	25 nitrate marine HR tests
HI783-25	25 magnesium marine tests
HI784-25	25 ammonia marine tests
HI93700-01	100 ammonia LR tests
HI93700-03	300 ammonia LR tests
HI93701-01	100 chlorine free tests (powder)
HI93701-03	300 chlorine free tests (powder)
HI93701-F	300 chlorine free tests (liquid)
HI93701-T	300 chlorine total tests (liquid)
HI93702-01	100 copper HR tests
HI93702-03	300 copper HR tests
HI93707-01	100 nitrite LR tests
HI93707-03	300 nitrite LR tests
HI93708-01	100 nitrite HR tests
HI93708-03	300 nitrite HR tests
HI93710-01	100 pH tests
HI93710-03	300 pH tests
HI93711-01	100 chlorine total tests (powder)
HI93711-03	300 chlorine total tests (powder)
HI93713-01	100 phosphate LR tests
HI93713-03	300 phosphate LR tests
HI93715-01	100 ammonia MR tests
HI93715-03	300 ammonia MR tests

Ordering Information	Description
HI93717-01	100 phosphate HR tests
HI93717-03	300 phosphate HR tests
HI93728-01	100 nitrate tests
HI93728-03	300 nitrate tests
HI93732-01	100 dissolved oxygen tests
HI93732-03	300 dissolved oxygen tests
HI93733-01	100 ammonia HR tests
HI93733-03	300 ammonia HR tests
HI937521-01	50 calcium tests
HI937521-03	150 calcium tests
HI95747-01	100 copper LR tests
HI95747-03	300 copper LR tests

12.2. pH ELECTRODES

Ordering Information	Description
HI10530	Triple ceramic, double junction, low temperature glass, refillable pH electrode with conical tip and temperature sensor
HI10430	Triple ceramic, double junction, high temperature glass, refillable pH electrode with temperature sensor
HI11310	Glass body, double junction, refillable pH/temperature electrode
HI11311	Glass body, double junction, refillable pH/temperature electrode with enhanced diagnostics
HI12300	Plastic body, double junction, gel filled, non refillable pH/temperature electrode
HI12301	Plastic body, double junction, gel filled, non refillable pH/temperature electrode with enhanced diagnostics
HI10480	Glass body, double junction with temperature sensor for wine analysis
FC2320	Double junction, open reference, non refillable, electrolyte viscolene, PVDF body with conical tip, pH/temperature electrode
FC2100	Double junction, open reference, non refillable, electrolyte viscolene, glass body with conical tip, pH/temperature electrode
FC2020	Double junction, open reference, non refillable, electrolyte viscolene, PVDF body with conical tip, pH/temperature electrode

***Note**: The enhanced diagnostics information are not displayed by meter.*

12.3. pH SOLUTIONS

BUFFER SOLUTIONS

Ordering Information	Description
HI70004P	pH 4.01 buffer sachet, 20 mL (25 pcs.)
HI70007P	pH 7.01 buffer sachet, 20 mL (25 pcs.)
HI70010P	pH 10.01 buffer sachet, 20 mL (25 pcs.)
HI7001L	pH 1.68 buffer solution, 500 mL
HI7004L	pH 4.01 buffer solution, 500 mL
HI7006L	pH 6.86 buffer solution, 500 mL
HI7007L	pH 7.01 buffer solution, 500 mL
HI7009L	pH 9.18 buffer solution, 500 mL
HI7010L	pH 10.01 buffer solution, 500 mL
HI8004L	pH 4.01 buffer solution in FDA approved bottle, 500 mL
HI8006L	pH 6.86 buffer solution in FDA approved bottle, 500 mL
HI8007L	pH 7.01 buffer solution in FDA approved bottle, 500 mL
HI8009L	pH 9.18 buffer solution in FDA approved bottle, 500 mL
HI8010L	pH 10.01 buffer solution in FDA approved bottle, 500 mL

ELECTRODE STORAGE SOLUTIONS

Ordering Information	Description
HI70300L	Storage solution, 500 mL
HI80300L	Storage solution in FDA approved bottle, 500 mL

ELECTRODE CLEANING SOLUTIONS

Ordering Information	Description
HI70000P	Electrode rinse sachet, 20 mL (25 pcs.)
HI7061L	General cleaning solution, 500 mL
HI7073L	Protein cleaning solution, 500 mL
HI7074L	Inorganic cleaning solution, 500 mL
HI7077L	Oil & fat cleaning solution, 500 mL
HI8061L	General cleaning solution in FDA approved bottle, 500 mL
HI8073L	Protein cleaning solution in FDA approved bottle, 500 mL
HI8077L	Oil & fat cleaning solution in FDA approved bottle, 500 mL

ELECTRODE REFILL ELECTROLYTE SOLUTIONS

Ordering Information	Description
HI7082	3.5M KCl electrolyte, 4x30 mL, for double junction electrodes
HI8082	3.5M KCl electrolyte in FDA approved bottle, 4x30 mL, for double junction electrodes

12.4. OTHER ACCESSORIES

Ordering Information	Description
HI72083300	Carrying case
HI731318	Cloth for wiping cuvettes (4 pcs.)
HI731331	Glass cuvette (4 pcs.)
HI731335N	Cap for cuvette (4 pcs.)
HI731340	200 µL automatic pipette
HI731341	1000 µL automatic pipette
HI731342	2000 µL automatic pipette
HI740034P	Cap for 100 mL beaker (10 pcs.)
HI740036P	100 mL plastic beaker (10 pcs.)
HI740038	60 mL glass bottle and stopper
HI740142P	1 mL graduated syringe (10 pcs)
HI740143	1 mL graduated syringe (6 pcs.)
HI740144P	Pipette tip for 1 mL graduated syringe (10 pcs.)
HI740157P	Plastic refilling pipette (20 pcs.)
HI740220	25 mL graduated glass vial (2 pcs.)
HI740224	170 mL plastic beaker (6 pcs.)
HI740225	60 mL graduated syringe
HI740226	5 mL graduated syringe with black printing
HI740229	100 mL graduated cylinder
HI740237	5 mL graduated syringe with blue printing
HI740270	10 mL syringe with Luer lock
HI740271	Filter holder with Luer lock
HI740272	16 gauge blunt needle (6 pcs.)
HI740273	Marine Nitrate LR measurement kit
HI740274	Syringe replacement kit
HI75110/220E	USB power adapter, European plug
HI75110/220U	USB power adapter, USA plug
HI76404A	Electrode holder
HI83303-11	CAL Check™ cuvette kit for HI83303
HI83300-100	Sample preparation kit consisting of activated carbon for 50 tests, demineralizer bottle for 10 L of water, 100 mL graduated beaker with cap, 170 mL graduated beaker with cap, 3 mL pipette, 60 mL syringe, 5 mL syringe, graduated cylinder, spoon, funnel, filtter paper (25 pcs.)
HI920015	USB to micro USB cable connector
HI93703-50	Cuvette cleaning solution (250 mL)
HI93703-55	Activated carbon (50 pcs.)

13. ABBREVIATIONS

Abs	Absorbance
GLP	Good Laboratory Practice
NIST	National Institute of Standards and Technology
EPA	US Environmental Protection Agency
g/L	grams per liter (ppt)
µg/L	micrograms per liter (ppb)
mg/L	milligrams per liter (ppm)
mL	milliliter
HR	High Range
LR	Low Range
MR	Medium Range
ULR	Ultra Low Range

CERTIFICATION

All Hanna® instruments conform to the **CE European Directives.**



Disposal of Electrical & Electronic Equipment. The product should not be treated as household waste. Instead, hand it over to the appropriate collection point for the recycling of electrical and electronic equipment, which will conserve natural resources.

Disposal of waste batteries. This product contains batteries, do not dispose of them with other household waste. Hand them over to the appropriate collection point for recycling.

Ensuring proper product and battery disposal prevents potential negative consequences for the environment and human health. For more information, contact your city, your local household waste disposal service, or the place of purchase.

RECOMMENDATIONS FOR USERS

Before using this product, make sure it is entirely suitable for your specific application and for the environment in which it is used. Any variation introduced by the user to the supplied equipment may degrade the photometer's performance. For your and the photometer's safety do not use or store the meter in hazardous environments.

WARRANTY

The HI83303 is warranted for two years against defects in workmanship and materials when used for its intended purpose and maintained according to instructions. This warranty is limited to repair or replacement free of charge. Damage due to accidents, misuse, tampering, or lack of prescribed maintenance is not covered. If service is required, contact your local Hanna Instruments® office. If under warranty, report the model number, date of purchase, serial number (engraved on the bottom of the meter), and the nature of the problem. If the repair is not covered by the warranty, you will be notified of the charges incurred. If the instrument is to be returned to Hanna Instruments, first obtain a Returned Goods Authorization (RGA) number from the Technical Service department and then send it with shipping costs prepaid. When shipping any instrument, make sure it is properly packed for complete protection.

MAN83303 | Printed in Romania